



NOVETI


SE slim G3
Meanwell

Series




Spécifications:

Corps: Aluminum
Conductivité thermique: 96 W/m·K
Led: Cree 3030
CRI: Ra>70
SDCM: < 6
Facteur de puissance: >0.95
THD: <15
Driver: Osram / Meanwell
Driver Efficacité: >93%
Protection: OTP, OCP, OVP,
Surtension: 6KV
Waterproof: IP66
Test Impact: IK08&IK10
Tension: 100-277V, 50/60Hz
Operation Temperature: -40~50°C
TM21: L90B10>50,000H
Lifetime: 50,000H

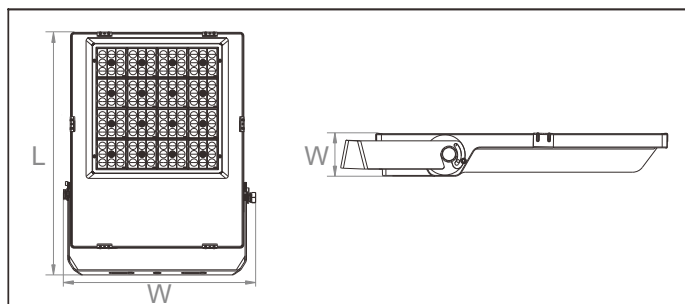

Optiques:

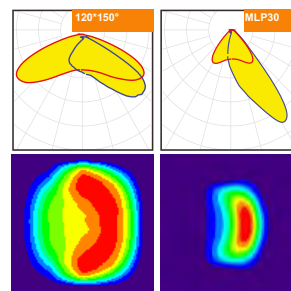


Model	Driver	Watt	Voltage	Lumen		Optique	CRI	IP	Dimension
FL100SE	Osram	100W	100~277V	15000LM	150lm/w	120°x150	>70	IP66	292*246*53
FL150SE	Osram	150W	100~277V	22500LM		120°x150	>70	IP66	336*264*53
FL200SE	Osram	200W	100~277V	34000LM	170 lm/w	MLP30	>70	IP66	407*328*53
FL240SE	MeanWell	240W	100~277V	40800LM		MLP30	>70	IP66	407*328*53
FL400SE	MeanWell	400W	100~277V	68000LM		MLP30	>70	IP66	496*411*71



NOVETI

SE slim G3 series

Dimension

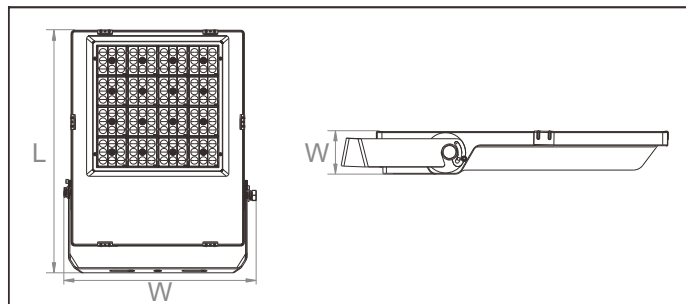

Model	Dimension L*W*W mm
FL100SE	292*246*53
FL150SE	336*264*53
FL200SE	407*328*53
FL240SE	407*328*53
FL400SE	496*411*71

Emballage

Model	Carton(mm)			Luminaire	
	L	W	H	NW(kg)	GW(kg)
FL100SE	370	275	105	2.50	2.90
FL150SE	415	300	120	3.30	3.80
FL200SE	485	385	140	5.20	5.80
FL240SE	485	385	140	5.45	6.10
FL300SE	586	473	165	9.60	10.20
FL400SE	586	473	165	9.60	10.20

