



PRODUCT CATALOG

2026

Architectural Lighting - Indoor & Outdoor

NOVETI PRODUCT CATALOG 2026 - PART 1

Architectural Lighting – Indoor & Outdoor

Indoor Lighting

- Recessed Downlights
 - Adjustable Downlights
 - Surface Mounted Luminaires
 - Track Lighting Systems
 - Linear & Modular Systems
 - Decorative & Accent Lighting
-

Outdoor Architectural Lighting


- Wall & Facade Luminaires
- Bollards & Pathway Lighting
- In-ground & Step Lights
- Projectors & Floodlights
- Urban & Architectural Accents




INDOOR LIGHT CONTENTS



INDOOR LIGHT CONTENTS

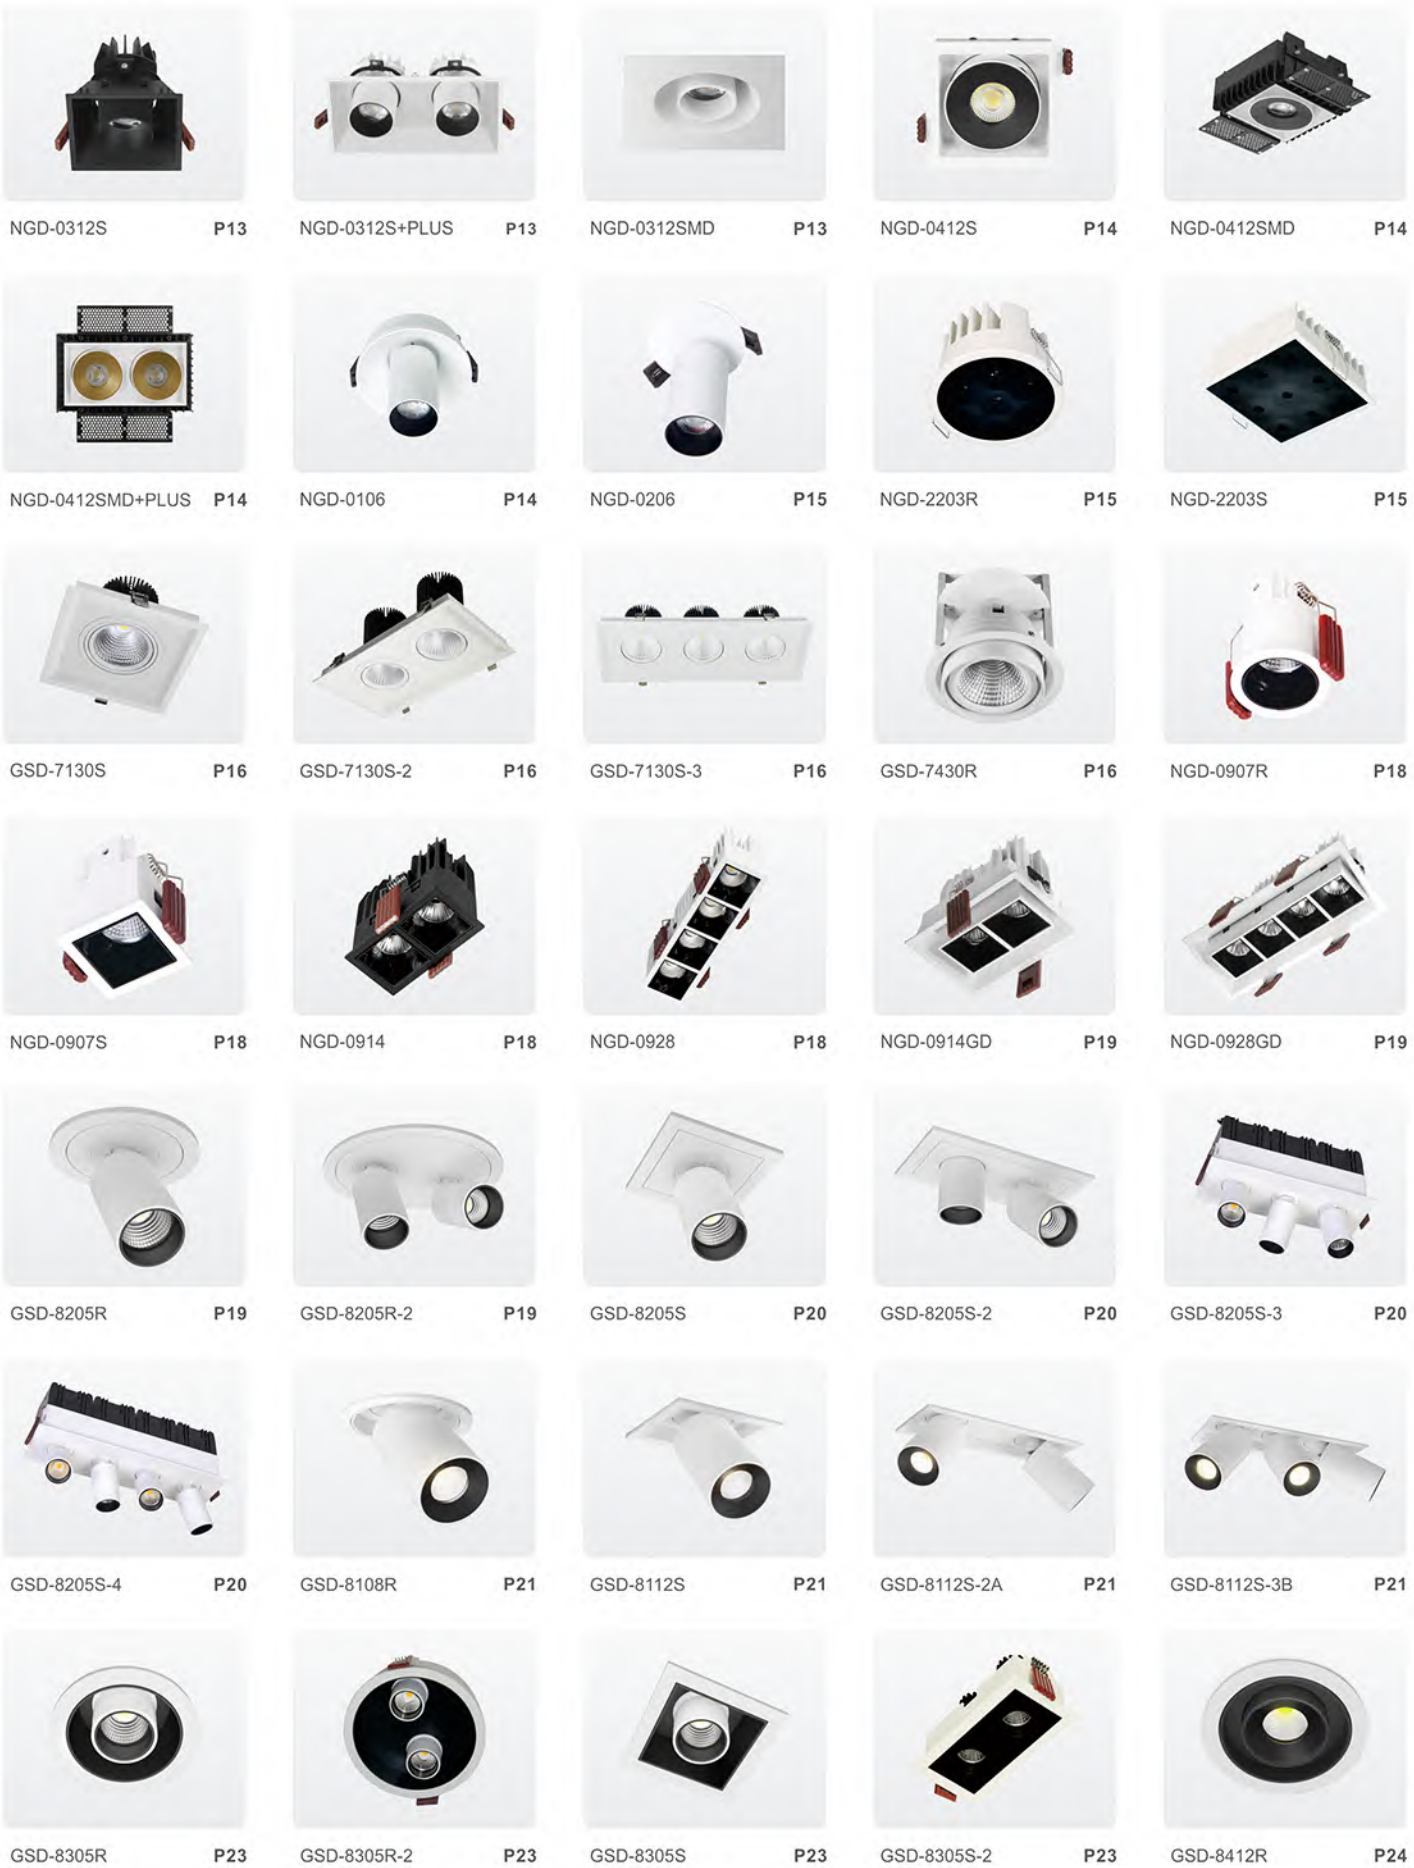


INDOOR LIGHT CONTENTS

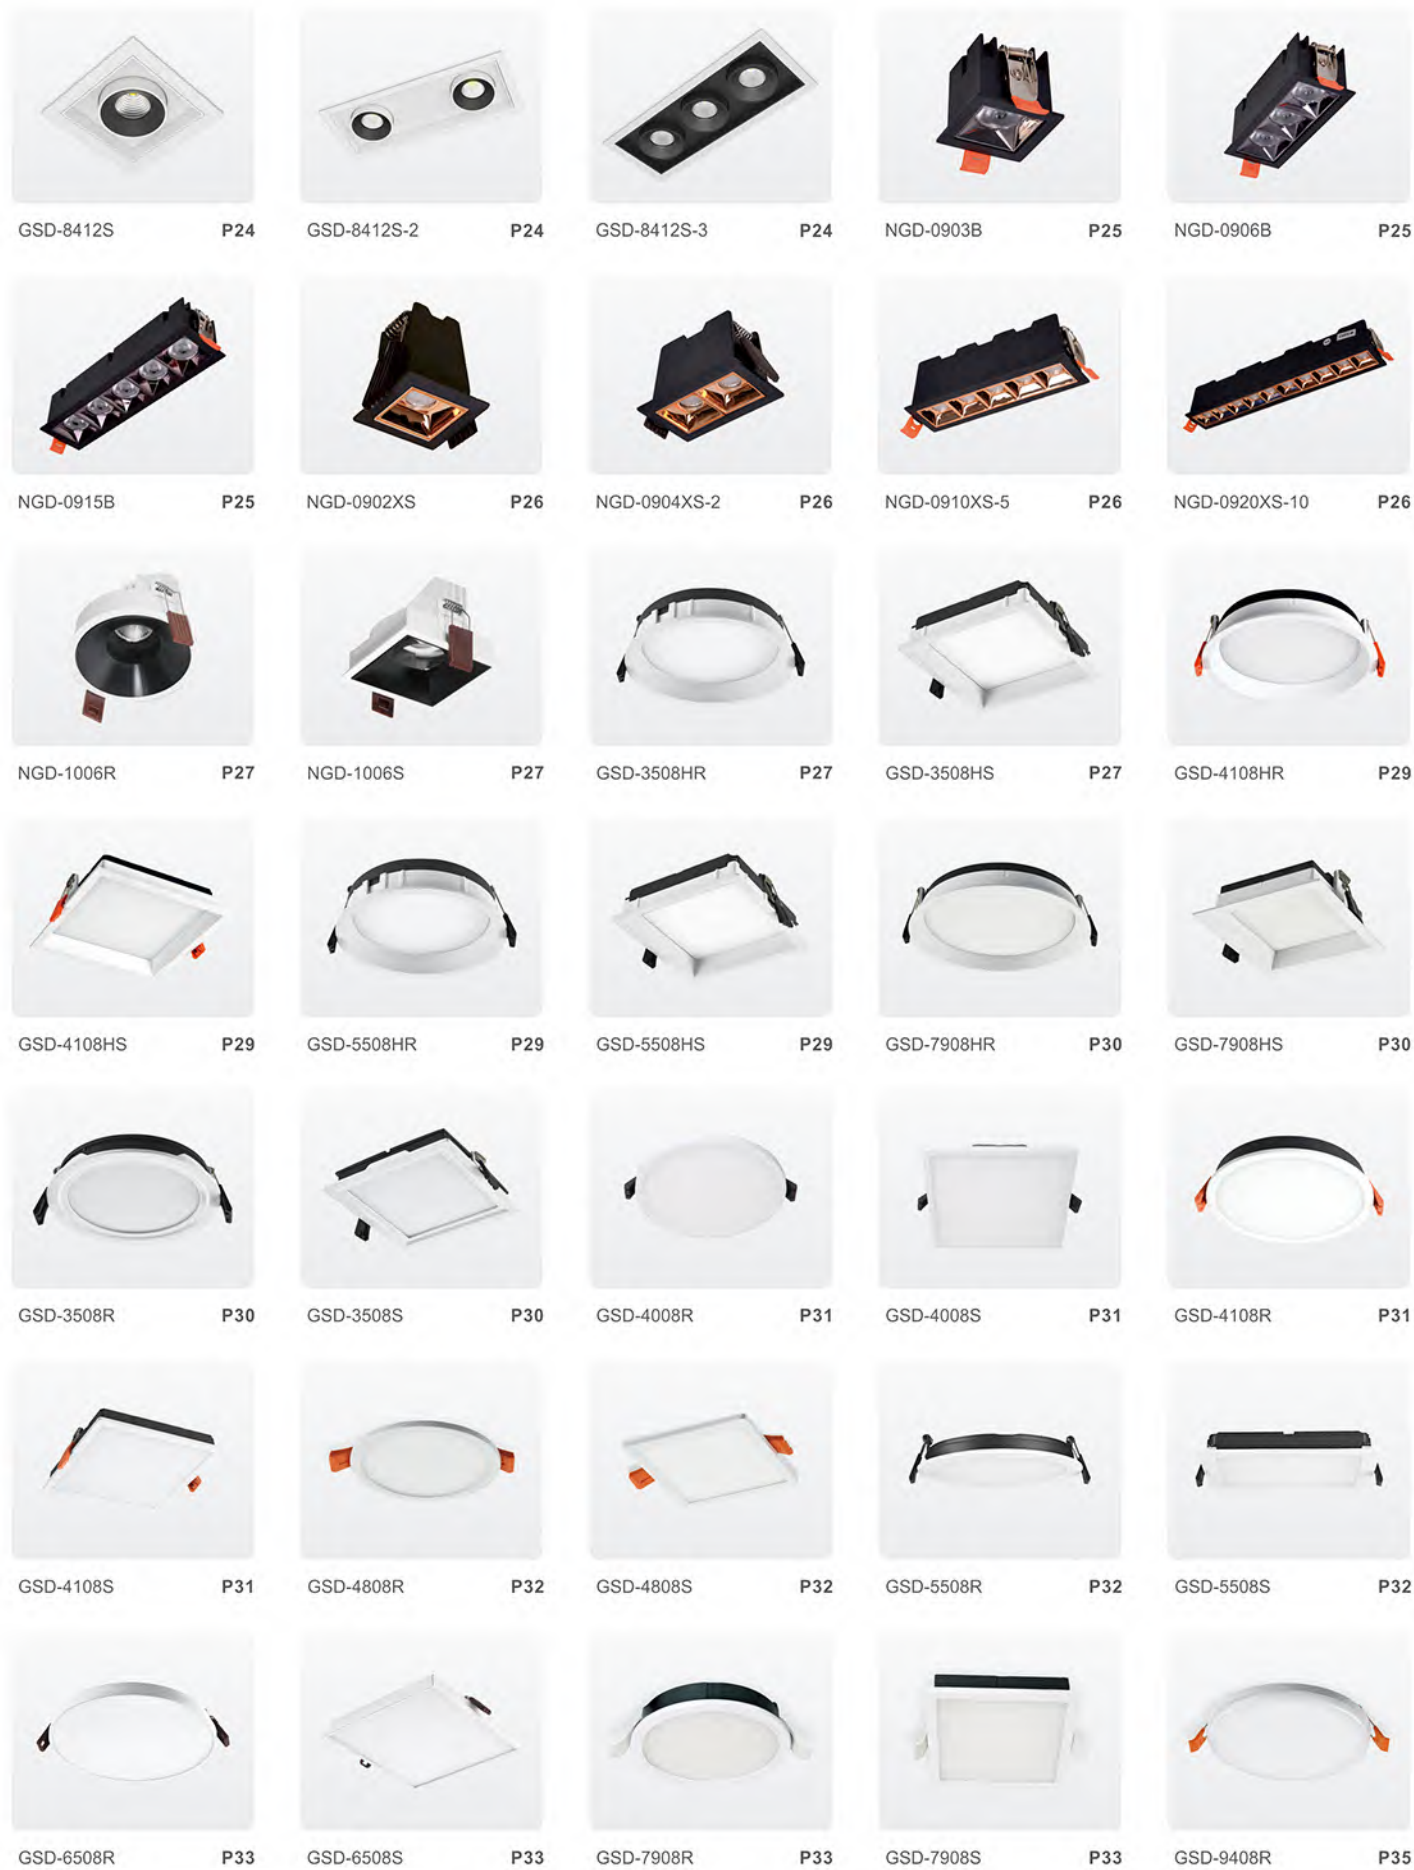

NOVETI

INDOOR LIGHT CONTENTS

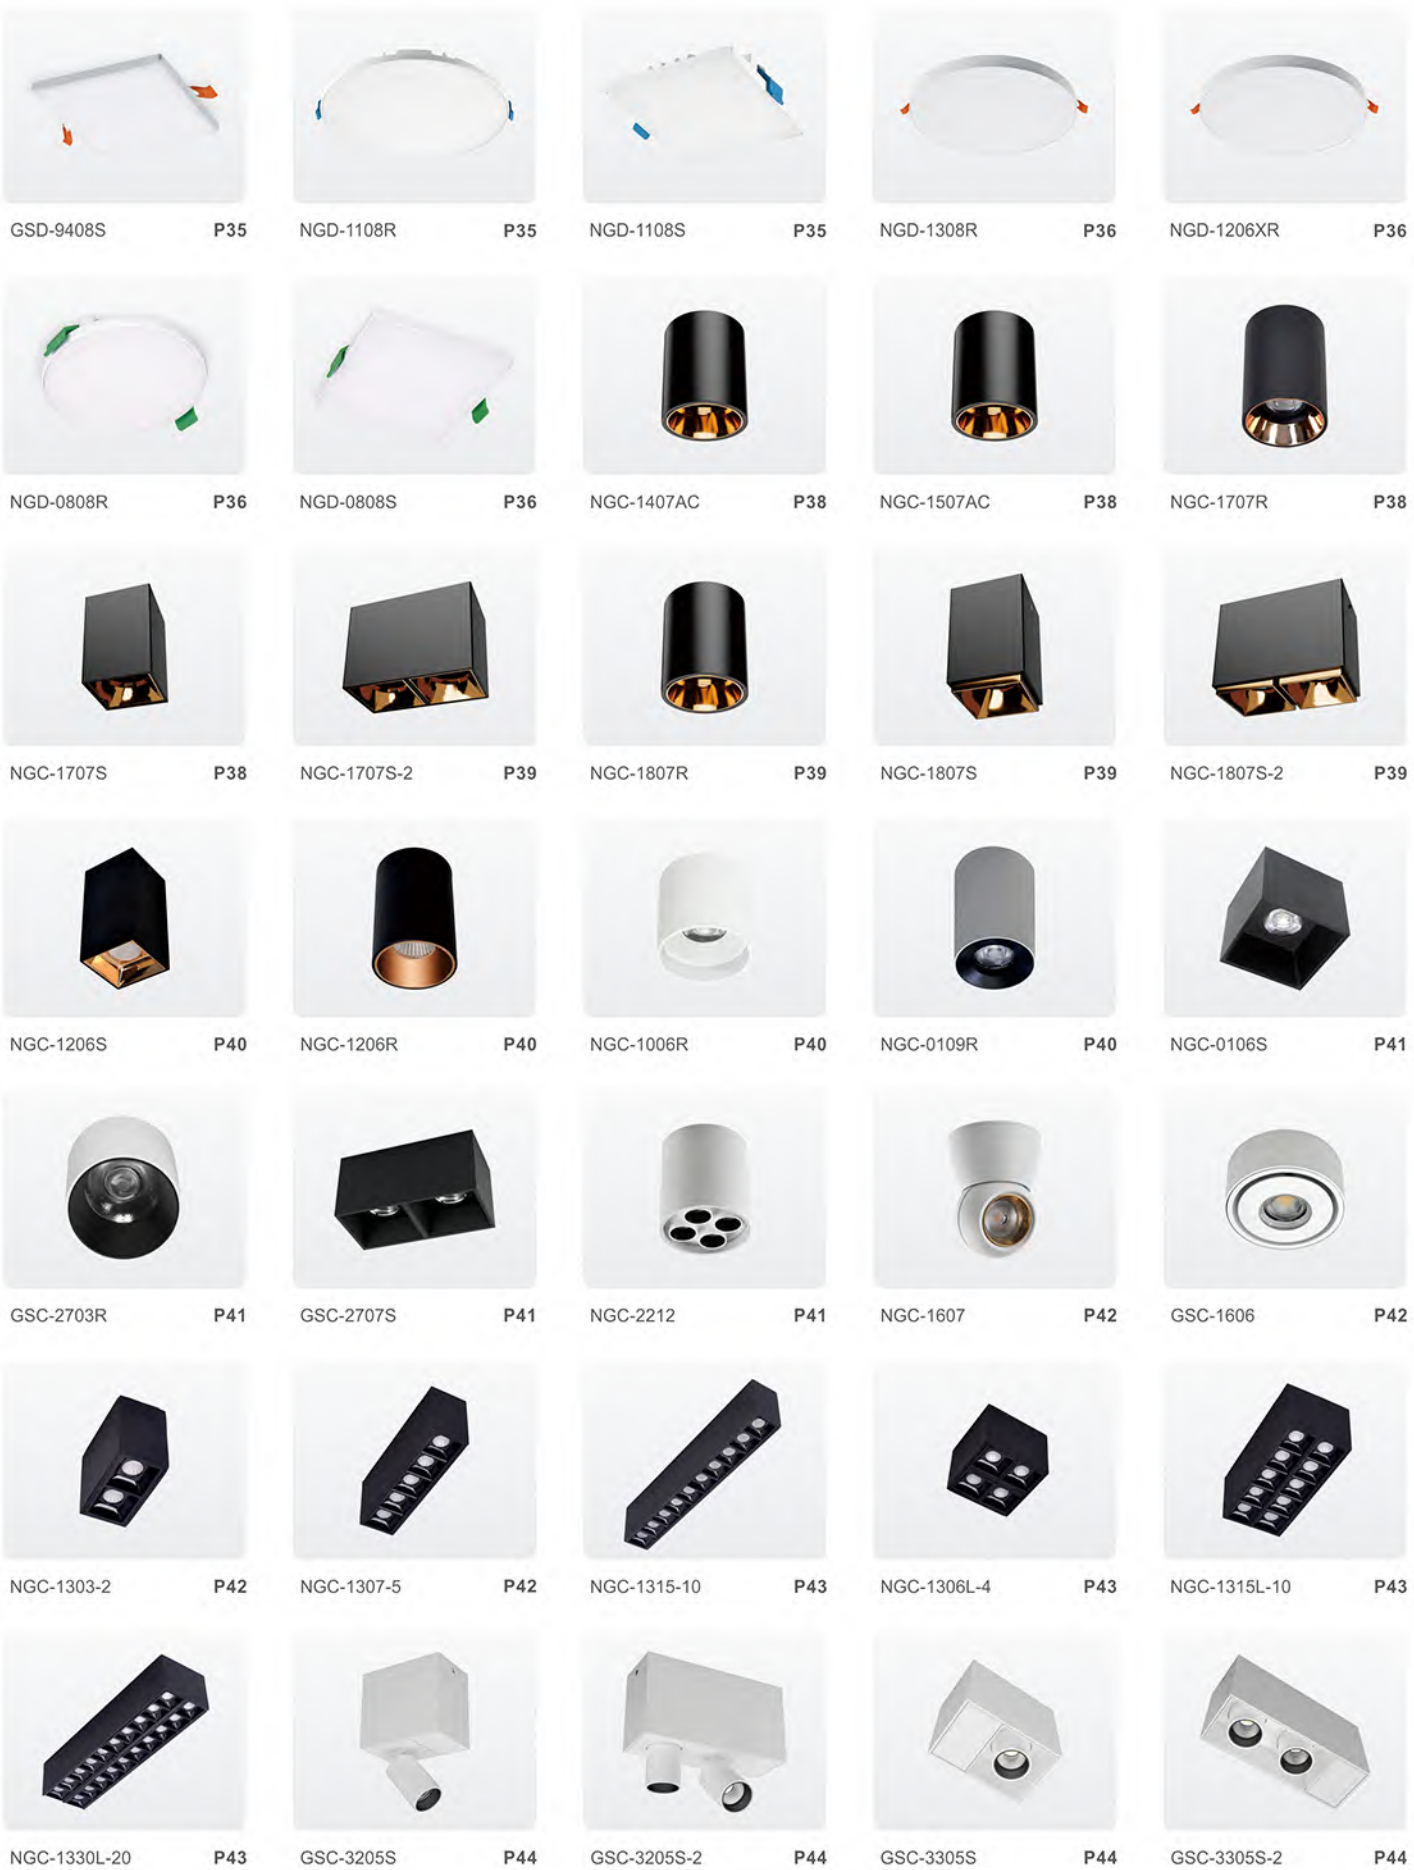

NOVETI

INDOOR LIGHT CONTENTS



GSC-1208S P46



GSC-1308R P46



GSC-1308S P46



NGC-1108R P46



NGC-1108S P47



GSC-1008S P47



GSC-1008R P47



GSC-1208R P47



GSC-4108R P48



GSC-4108S P48



NGL-0907 P50



NGL-1007 P50



NL-0812C P50



NL-0812CS P50



GS20DX-7W P51



GS20F-48P P51



GS20G-6P P51



GS20Z-6P P51



GS20G-3W P52



GS20P-6P P52



NGL-CA1M P53



NGL-TA3M P53



NGL-MZ80MM P53



NGL-AZ80MM P53



GS27L P53



GS28L P53



GS29L P53



GS23L-10W P55



GS24L-10W P55



GS26-6W P55



GS36-6W P55



GS38-7W P55



GS30GD P56



GS31D P56



GS32L P56



GS33Y P56



GS34T P56



GS35S P56



GS39 P56



GS40-100W P56



GST-1607 P58



NGT-1107 P58



NGT-0707 P58



NGT-0112 P58



NGT-0510R P59



NGT-0212S P59



NGT-0212R P59



NGT-0312 P59



GSC-2912 P60



NGC-0710R P60



NGC-0206 P60



NGC-0606GD P60



NGC-0412S P61



NGC-0412R P61



GSP-0205-6 P61



NGP-0530 P61



GSP-0305 P62



NGP-0106 P62



GSP-0407 P62



NGP-0606 P62

INDOOR LIGHT CONTENTS

OUTDOOR LIGHT CONTENTS



GSG-2807SF P64



GSG-2807SFA P64



GSG-2807X P64



GSG-2807H P64



GSG-2703SF P65



GSG-2703SFC P65



GSG-2703SFA P65



GSG-2703SFCA P65



GSG-2703X P66



GSG-2703X1 P66



GSG-2703XC P66



GSG-2703XC1 P66



GOW-0306 P68



GOW-0306-2 P68



GSG-2306X P68



GSG-2306X-2 P68



GSG-2203 P69



GSG-2203X P69



GSG-0106 P69



GSG-0206 P69



GSG-1303XC P70



GSG-1303SFX P70



GSG-1303X(spike) P70



GSG-1715 P71



GSG-1303SFC P71



GSG-1303SF P71



GSG-1307B P71



GSG-2506 P74



GOW-1306 P74



GOW-1406 P74



GOW-1206-2 P74



GOW-0812 P76



GOW-0812H P76



GOW-1103A P76



GOW-1103B P76

OUTDOOR LIGHT CONTENTS



GOW-1103C P77



GOW-1103D P77



GOW-1103-2A P77



GOW-1103-2D P77



GOW-1103-2AB P77



GOW-0103-2 P80



GOW-0203-2 P80



GSW-8912 P80



GSW-9012H P82



GSW-9012 P82




GSW-9103S P82



GSW-9103R P82



GSW-8812 P83



GSW-7012 P83



GSW-6705 P83



GSW-6506 P83



GSW-6304 P86



GSW-6302S P86



GSW-4401X P86



GOW-1506 P87



GOW-0906 P87



GOW-0506 P87



GOW-0602 P87



GOW-0704S P88



GOW-0704L P88



GOW-0704R P88



GSW-9208 P88



GSW-6006S P90



GSW-6006R P90



GSW-6212 P90



GSW-3903 P90



GSW-4101X P92



GSW-4309 P92



GSW-4006 P92



GSW-4212 P92

OUTDOOR LIGHT CONTENTS



GSW-4606S P93



GSW-4606R P93



GSW-4512S P93



GSW-4512R P93



GSW-4810 P95



GSW-4906 P95



GSW-3605S P95



GSW-3705R P95



GSW-3705S P96



GSW-3805R P96



GSW-3805S P96



GSW-3505R P96



GSW-3505S P97



GSW-3605R P97



GSW-5810 P97



GSW-5118 P97



GSW-5710S P99



GSW-5710R P99



GSW-5910 P99



GSW-5005 P99



GSW-2709 P100



GSW-2805 P100



GSW-3415 P100



GSW-1506 P100



GSW-2003 P101



GSW-2503 P101



GSW-2012X P101



GSW-2102 P101



GSW-2306 P104



GSW-2206 P104



NGW-0110 P104



NGW-0206 P104



NGW-0412 P106



NGW-0506 P106



NGW-0506L P106

OUTDOOR LIGHT CONTENTS



NGW-0609 P106



NGW-0709 P108



NGC-2507 P108



GSC-2514S P108



GSC-2514R P108



GSC-2808S P109



GSC-2808R P109



GSC-3403 P109




GSU-0802 P111



GSU-0804 P111



GSU-0806 P111



GSU-1205 P111



GSU-1205S P113



GSU-0703 P113



GSU-0703SS P113



GSU-1003 P113



GSU-1003SS P114



GSU-0503 P114



GSU-0603 P114



GSU-1407A P114



GSU-0306 P115



GSU-1303 P115



GSU-0903R P115



COLOR: ☐ WH ☒ BK ☐ SV

Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle
NGD-3007S	7W	66*66*58mm	55*55*58mm	>90	90~280V	630LM	24°/38°
NGD-3012S	12W	85*85*68mm	75*75*68mm	>90	90~280V	1080LM	24°/38°



COLOR: ☐ WH ☒ BK ☐ SV

Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle
NGD-3007R	7W	Ø65*55mm	Ø55mm	>90	90~280V	630LM	24°/38°
NGD-3012R	12W	Ø85*64mm	Ø75mm	>90	90~280V	1080LM	24°/38°



COLOR: ☐ WH ☒ BK ☐ SV


Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle
NGD-3107S	7W	66*66*58mm	55*55*58mm	>90	90~280V	630LM	24°/38°
NGD-3112S	12W	85*85*68mm	75*75*68mm	>90	90~280V	1080LM	24°/38°




COLOR: ☐ WH ☒ BK ☐ SV

Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle
NGD-3107R	7W	Ø65*55mm	Ø55mm	>90	90~280V	630LM	24°/38°
NGD-3112R	12W	Ø85*64mm	Ø75mm	>90	90~280V	1080LM	24°/38°


NGD-3007S




NGD-3007R



NGD-3107S



NGD-3107R



INDOOR LIGHT



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	Cut-Size	CRI	Input	Luminous Flux	Beam angle
NGD-3607	7W	Ø60*75mm	Ø55*27mm	>90	90~280V	630LM	24°/38°
NGD-3612	12W	Ø80*85mm	Ø73*32mm	>90	90~280V	1800LM	24°/38°



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	Cut-Size	CRI	Input	Luminous Flux	Beam angle
NGD-3607-2	7W*2	160*65*80mm	147*53*27mm	>90	90~280V	1260LM	24°/38°
NGD-3612-2	12W*2	200*80*90mm	188*70*32mm	>90	90~280V	2160LM	24°/38°



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	Cut Size	CRI	Input	Luminous Flux	Beam angle
NGD-5307R	7W	61*75mm	55*75mm	>90	90~280V	630LM	12°/24°/36°
NGD-5312R	12W	83*95mm	75*95mm	>90	90~280V	1080LM	12°/24°/36°




COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	Cut Size	CRI	Input	Luminous Flux	Beam angle
NGD-5320R	20W	105*118mm	95*118mm	>90	90~280V	1800LM	12°/24°/36°

NGD-3612



NGD-3612-2



INDOOR LIGHT



INDOOR LIGHT



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	Cut Size	CRI	Input	Luminous Flux	Beam angle
NGD-5320S	20W	105*105*118mm	95*118mm	>90	90~280V	1800LM	12°/24°/36°



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	Cut Size	CRI	Input	Luminous Flux	Beam angle
NGD-5330R	30W	135*142mm	120*140mm	>90	90~280V	2700LM	12°/24°/36°
NGD-5340R	40W	135*142mm	120*140mm	>90	90~280V	3600LM	12°/24°/36°



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	Cut Size	CRI	Input	Luminous Flux	Beam angle
NGD-5512R	12W	83*94mm	75*95mm	>90	90~280V	1080LM	12°/24°/36°
NGD-5520R	20W	105*95mm	95*95mm	>90	90~280V	1800LM	12°/24°/36°



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	Cut Size	CRI	Input	Luminous Flux	Beam angle
NGD-5512S	12W	84*84*94mm	75*75*95mm	>90	90~280V	1080LM	12°/24°/36°



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	Cut Size	CRI	Input	Luminous Flux	Beam angle
NGD-5407R	7W	52*75mm	55*75mm	>90	90~280V	630LM	12°/24°/36°
NGD-5412R	12W	73*95mm	75*95mm	>90	90~280V	1080LM	12°/24°/36°

INDOOR LIGHT



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	Cut Size	CRI	Input	Luminous Flux	Beam angle
NGD-5420HR	20W	95*120mm	95*120mm	>90	90~280V	1800LM	12°/24°/36°



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	Cut Size	CRI	Input	Luminous Flux	Beam angle
NGD-5407MR	7W	79*75mm	55*75mm	>90	90~280V	630LM	12°/24°/36°
NGD-5412MR	12W	100*94mm	75*95mm	>90	90~280V	1080LM	12°/24°/36°
NGD-5420MR	20W	115*120mm	95*120mm	>90	90~280V	1800LM	12°/24°/36°



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	Cut Size	CRI	Input	Luminous Flux	Beam angle
NGD-5612S	12W	73*73*95mm	75*75*95mm	>90	90~280V	1080LM	12°/24°/36°



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	Cut Size	CRI	Input	Luminous Flux	Beam angle
NGD-5612SMD-2	12W*2	145*73*95mm	145*75*95mm	>90	90~280V	2160LM	12°/24°/36°



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	Cut Size	CRI	Input	Luminous Flux	Beam angle
NGD-5612SMD-3	12W*3	220*73*95mm	220*73*95mm	>90	90~280V	3240LM	12°/24°/36°



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	Cut Size	CRI	Input	Luminous Flux	Beam angle
NGD-3912	7W	Ø53*66mm	Ø45mm	>90	90~280V	630LM	24°/36°



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	Cut Size	CRI	Input	Luminous Flux	Beam angle
NGD-3912M	7W	Ø60*66mm	Ø50mm	>90	90~280V	630LM	24°/36°







COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	Cut Size	CRI	Input	Luminous Flux	Beam angle
NGD-3912L	7W	Ø53*66mm	Ø45mm	>90	90~280V	630LM	24°/36°



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	Cut Size	CRI	Input	Luminous Flux	Beam angle
NGD-4012	7W	Ø53*66mm	Ø45mm	>90	90~280V	630LM	24°/36°



INDOOR LIGHT



IP20		F		CE		COLOR: WH BK SV	
Model	Power	Size	Cut Size	CRI	Input	Luminous Flux	Beam angle
NGD-4012M	7W	Ø60*66mm	Ø50mm	>90	90~280V	630LM	24°/36°



IP20		F		CE		COLOR: WH BK SV	
Model	Power	Size	Cut Size	CRI	Input	Luminous Flux	Beam angle
NGD-4012L	7W	Ø53*66mm	Ø45mm	>90	90~280V	630LM	24°/36°



IP20		F		CE		COLOR: WH BK SV	
Model	Power	Size	Cut Size	CRI	Input	Luminous Flux	Beam angle
NGD-4112	7W	Ø70*66mm	Ø45mm	>90	90~280V	630LM	24°/36°



IP20		F		CE		COLOR: WH BK SV	
Model	Power	Size	Cut Size	CRI	Input	Luminous Flux	Beam angle
NGD-4112M	7W	Ø84*66mm	Ø50mm	>90	90~280V	630LM	24°/36°

INDOOR LIGHT



IP20		F		CE		COLOR: WH BK SV	
Model	Power	Size	Cut Size	CRI	Input	Luminous Flux	Beam angle
NGD-4112L	7W	Ø70*66mm	Ø45mm	>90	90~280V	630LM	24°/36°



IP20		F		CE		COLOR: WH BK SV	
Model	Power	Size	Cut Size	CRI	Input	Luminous Flux	Beam angle
NGD-4212	7W	Ø70*66mm	Ø45mm	>90	90~280V	630LM	24°/36°




IP20		F		CE		COLOR: WH BK SV	
Model	Power	Size	Cut Size	CRI	Input	Luminous Flux	Beam angle
NGD-4212M	7W	Ø84*66mm	Ø50mm	>90	90~280V	630LM	24°/36°




IP20		F		CE		COLOR: WH BK SV	
Model	Power	Size	Cut Size	CRI	Input	Luminous Flux	Beam angle
NGD-4212L	7W	Ø70*66mm	Ø45mm	>90	90~280V	630LM	24°/36°


NGD-4012M




NGD-4012L




NGD-4112



NGD-4112M



NGD-4112L




NGD-4212



NGD-4212M



NGD-4212L



INDOOR LIGHT



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle
NGD-0312R	12W	Ø91*93mm	Ø85mm	>90	90~280V	1080LM	12°/24°/36°



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle
NGD-0312S	12W	91*91*93mm	86*86mm	>90	90~280V	1080LM	12°/24°/36°



COLOR: ☐ WH ☐ BK ☐ SV


Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle
NGD-0312S+PLUS	12W*2	172*91*93mm	165*86mm	>90	90~280V	2160LM	12°/24°/36°




COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle
NGD-0312SMD	12W	85*93mm	110mm	>90	90~280V	1080LM	12°/24°/36°


NGD-0312R




NGD-0312S



NGD-0312S+PLUS



NGD-0312SMD



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle
NGD-0412S	12W	98*98*93mm	Ø90*90mm	>90	90~280V	1080LM	12°/24°/36°



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle
NGD-0412SMD	12W	85*85*93mm	110*110mm	>90	90~280V	1080LM	12°/24°/36°



COLOR: ☐ WH ☐ BK ☐ SV


Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle
NGD-0412SMD+PLUS	24W	166*85*93mm	110*190mm	>90	90~280V	2160LM	12°/24°/36°




COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle
NGD-0106	6W	Ø111*115mm	Ø98mm	>90	90~280V	540LM	12°/24°/36°


NGD-0412S




NGD-0412SMD



NGD-0412SMD+PLUS



NGD-0106



INDOOR LIGHT



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle
NGD-0206	6W	Ø80*121mm	Ø55mm	>90	90~280V	540LM	12°/24°/36°
NGD-0212	12W	Ø111*141mm	Ø55mm	>90	90~280V	1080LM	12°/24°/36°



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle
NGD-2203R	3W	Ø40*32mm	Ø30mm	>80	90~280V	270LM	36°
NGD-2205R	5W	Ø40*32mm	Ø30mm	>80	90~280V	450LM	36°
NGD-2208R-3	8W	Ø61*42mm	Ø55mm	>80	90~280V	720LM	36°
NGD-2215R-7	15W	Ø80*55mm	Ø75mm	>80	90~280V	1350LM	36°



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle
NGD-2203S	6W	40*40*42mm	35*35mm	>80	90~280V	540LM	36°
NGD-2210S-4	10W	70*70*42mm	65*65mm	>80	90~280V	900LM	36°
NGD-2218S-9	18W	100*100*42mm	95*95mm	>80	90~280V	1620LM	36°
NGD-2205S-2	5W	69*40*42mm	65*35mm	>80	90~280V	450LM	36°
NGD-2208S-3	8W	100*40*42mm	95*35mm	>80	90~280V	720LM	36°
NGD-2212S-5	12W	160*40*42mm	155*35mm	>80	90~280V	1080LM	36°



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle
GSD-7130S	30W	200*200*128mm	185*185mm	>90	90~280V	2700LM	36°



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle
GSD-7130S-2	30W*2	350*200*128mm	330*185mm	>90	90~280V	5400LM	36°



COLOR: ☐ WH ☐ BK ☐ SV


Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle
GSD-7130S-3	30W*3	500*200*128mm	485*185mm	>90	90~280V	8100LM	36°




COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle
GSD-7430R	30W	Ø175*156mm	Ø160mm	>90	90~280V	2700LM	24°/36°/60°


NGD-0206




NGD-2203R




NGD-2203S




GSD-7130S




GSD-7130S-2



GSD-7130S-3



GSD-7430R





IP20 F □ CCC CE

COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle
NGD-0907R	7W	Ø42*56mm	Ø36mm	>90	90~280V	630LM	36°



IP20 F □ CCC CE

COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle
NGD-0907S	7W	42*42*56mm	36*36mm	>90	90~280V	630LM	36°



IP20 F □ CCC CE

COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle
NGD-0914	7W*2	77*42*67mm	72*36mm	>90	90~280V	1260LM	36°




IP20 F □ CCC CE


COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle
NGD-0928	7W*4	149*42*67mm	142*36mm	>90	90~280V	2520LM	36°


NGD-0907S

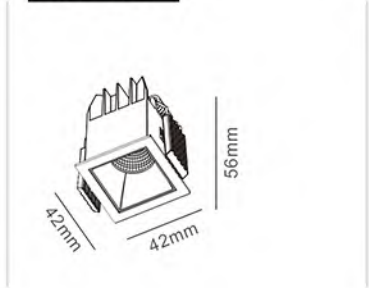

NGD-0914



NGD-0928



INDOOR LIGHT



IP20	F								COLOR: WH BK SV
Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle		
NGD-0914GD	7W*2	97*69*67mm	72*62mm	>90	90~280V	1260LM	36°		



IP20	F								COLOR: WH BK SV
Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle		
NGD-0928GD	7W*4	168*69*67mm	92*62mm	>90	90~280V	2520LM	36°		




IP20	F								COLOR: WH BK SV
Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle		
GSD-8205R	5W	Ø28*Ø63*70mm	Ø60mm	>90	90~280V	450LM	36°		




IP20	F								COLOR: WH BK SV
Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle		
GSD-8205R-2	5W*2	Ø28*Ø115*70mm	Ø110mm	>90	90~280V	900LM	36°		


NGD-0914GD




NGD-0928GD



GSD-8205R



GSD-8205R-2



INDOOR LIGHT



IP20	F								COLOR: WH BK SV
Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle		
GSD-8205S	5W	Ø28*62*62*70mm	55*55mm	>90	90~280V	450LM	90°		



IP20	F								COLOR: WH BK SV
Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle		
GSD-8205S-2	5W*2	Ø28*64*114*70mm	105*55mm	>90	90~280V	900LM	90°		




IP20	F								COLOR: WH BK SV
Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle		
GSD-8205S-3	5W*3	Ø28*64*170*70mm	160*55mm	>90	90~280V	1350LM	90°		




IP20	F								COLOR: WH BK SV
Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle		
GSD-8205S-4	5W*4	Ø28*64*210*70mm	210*55mm	>90	90~280V	1800LM	90°		


GSD-8205S



GSD-8205S-2



GSD-8205S-3



INDOOR LIGHT



COLOR: ☐ WH ☒ BK ☐ SV

Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle
GSD-8108R	8W	Ø45*110* Ø85mm	Ø75mm	>90	90~280V	720LM	36°
GSD-8112R	12W	Ø45*110* Ø85mm	Ø75mm	>90	90~280V	1080LM	36°
GSD-8115R	15W	Ø103*63* Ø113mm	Ø90mm	>90	90~280V	1350LM	36°



COLOR: ☐ WH ☒ BK ☐ SV

Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle
GSD-8112S	12W	Ø45*85*85*110mm	75*75mm	>90	90~280V	1080LM	36°



COLOR: ☐ WH ☒ BK ☐ SV

Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle
GSD-8112S-2A	12W*2	Ø45*200*80*110mm	190*70mm	>90	90~280V	2160LM	36°




COLOR: ☐ WH ☒ BK ☐ SV

Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle
GSD-8112S-3B	12W*3	Ø45*200*80*110mm	190*70mm	>90	90~280V	3240LM	36°


GSD-8108R




GSD-8112S



GSD-8112S-2A



GSD-8112S-3B



INDOOR LIGHT



INDOOR LIGHT



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle
GSD-8305R	5W	Ø28*63*Ø64mm	Ø60mm	>90	90~280V	450LM	36°



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle
GSD-8305R-2	5W*2	Ø28*68*Ø115mm	Ø110mm	>90	90~280V	900LM	36°



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle
GSD-8305S	5W	Ø28*62*62*64mm	55*55mm	>90	90~280V	450LM	36°




COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle
GSD-8305S-2	5W*2	Ø28*60*114*64mm	105*55mm	>90	90~280V	900LM	36°


GSD-8305R




GSD-8305R-2



GSD-8305S



GSD-8305S-2



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle
GSD-8412R	12W	Ø45*85*Ø85mm	Ø75mm	>90	90~280V	1080LM	36°



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle
GSD-8412S	12W	Ø45*85*85*110mm	75*75mm	>90	90~280V	1080LM	36°



COLOR: ☐ WH ☐ BK ☐ SV


Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle
GSD-8412S-2	12W*2	Ø45*80*200*85mm	190*70mm	>90	90~280V	2160LM	36°




COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle
GSD-8412S-3	12W*3	Ø45*80*200*85mm	190*70mm	>90	90~280V	3240LM	36°


GSD-8412R




GSD-8412S



GSD-8412S-2



GSD-8412S-3



INDOOR LIGHT

INDOOR LIGHT



COLOR: ☐ WH ☒ BK ☐ SV

Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle
NGD-0903B	3W	54*54*47mm	48*46mm	>80	90~280V	240LM	36°



COLOR: ☐ WH ☒ BK ☐ SV


Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle
NGD-0906B	3W*3	129*54*47mm	124*46mm	>80	90~280V	240LM*3	36°



COLOR: ☐ WH ☒ BK ☐ SV

Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle
NGD-0915B	3W*5	216*64*52mm	202*46mm	>80	90~280V	240LM*5	36°

NGD-0915B



INDOOR LIGHT



COLOR: ☐ WH ☒ BK ☐ SV

Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle
NGD-0902XS	2W	45*45*50mm	37*37mm	>80	90~280V	160LM	36°



COLOR: ☐ WH ☒ BK ☐ SV

Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle
NGD-0904XS-2	2W*2	75*45*50mm	67*38mm	>80	90~280V	160*2LM	36°



COLOR: ☐ WH ☒ BK ☐ SV


Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle
NGD-0910XS-5	5W*2	145*45*50mm	139*37mm	>80	90~280V	400*2LM	36°




COLOR: ☐ WH ☒ BK ☐ SV

Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle
NGD-0920XS-10	10W*2	280*45*50mm	272*37mm	>80	90~280V	800*2LM	36°


NGD-0902XS




NGD-0904XS-2



NGD-0910XS-5



NGD-0920XS-10




INDOOR LIGHT



COLOR: ☐ WH ☒ BK ☐ SV

Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle
NGD-1006R	7W	Ø83*76mm	Ø75mm	>90	90~280V	630LM	36°
NGD-1012R	12W	Ø108*100mm	Ø100mm	>90	90~280V	1080LM	36°
NGD-1018R	18W	Ø108*100mm	Ø100mm	>90	90~280V	1620LM	36°

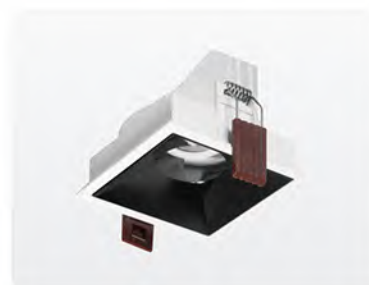

COLOR: ☐ WH ☒ BK ☐ SV

Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle
NGD-1006S	7W	83*83*76mm	75*75mm	>90	90~280V	630LM	36°
NGD-1012S	12W	108*108*105mm	100*100mm	>90	90~280V	1080LM	36°
NGD-1018S	18W	108*108*105mm	100*100mm	>90	90~280V	1620LM	36°



COLOR: ☐ WH ☒ BK ☐ SV


Model	Power	Size	Cut-out size	CRI	Input	Luminous Flux	Beam angle
GSD-3508HR	6W	Ø106*31mm	Ø91mm	>80	90~280V	800LM	120°
GSD-3515HR	15W	Ø145*33mm	Ø130mm	>80	90~280V	1500LM	120°
GSD-3522HR	22W	Ø176*34mm	Ø160mm	>80	90~280V	2200LM	120°




COLOR: ☐ WH ☒ BK ☐ SV

Model	Power	Size	Cut-out size	CRI	Input	Luminous Flux	Beam angle
GSD-3508HS	6W	113*113*45mm	100*100mm	>80	90~280V	800LM	120°
GSD-3515HS	15W	145*145*45mm	130*130mm	>80	90~280V	1500LM	120°
GSD-3522HS	22W	175*175*42mm	160*160mm	>80	90~280V	2200LM	120°


NGD-1006R




NGD-1006S



GSD-3508HR



GSD-3508HS



INDOOR LIGHT



INDOOR LIGHT



IP20 F CE COLOR: WH BK SV							
Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle
GSD-4108HR	8W	Ø123*47mm	Ø105mm	>80	90~280V	800LM	120°
GSD-4115HR	15W	Ø164*47mm	Ø150mm	>80	90~280V	1500LM	120°
GSD-4122HR	22W	Ø189*47mm	Ø175mm	>80	90~280V	2200LM	120°



IP20 F CE COLOR: WH BK SV							
Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle
GSD-4108HS	8W	123*123*47mm	105*105mm	>80	90~280V	800LM	120°
GSD-4115HS	15W	164*164*47mm	150*150mm	>80	90~280V	1500LM	120°
GSD-4122HS	22W	189*189*47mm	175*175mm	>80	90~280V	2200LM	120°




IP20 F CE COLOR: WH BK SV							
Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle
GSD-5508HR	8W	Ø106*56mm	Ø95mm	>80	90~280V	800LM	120°
GSD-5515HR	15W	Ø163*56mm	Ø150mm	>80	90~280V	1500LM	120°
GSD-5522HR	22W	Ø188*58mm	Ø175mm	>80	90~280V	2200LM	120°




IP20 F CE COLOR: WH BK SV							
Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle
GSD-5508HS	8W	103*103*53mm	92*92mm	>80	90~280V	800LM	120°
GSD-5515HS	15W	160*160*55mm	150*150mm	>80	90~280V	1500LM	120°
GSD-5522HS	22W	185*185*53mm	170*170mm	>80	90~280V	2200LM	120°


GSD-4108HR




GSD-4108HS




GSD-5508HR




GSD-5508HS



GSD-7908HR




GSD-7908HS



GSD-3508R



GSD-3508S



INDOOR LIGHT



IP20 F CE COLOR: WH BK SV							
Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle
GSD-7908HR	8W	Ø123*47mm	Ø107mm	>80	90~280V	800LM	120°
GSD-7915HR	15W	Ø164*47mm	Ø150mm	>80	90~280V	1500LM	120°
GSD-7922HR	22W	Ø189*47mm	Ø175mm	>80	90~280V	2200LM	120°



IP20 F CE COLOR: WH BK SV							
Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle
GSD-7908HS	8W	123*123*47mm	107*107mm	>80	90~280V	800LM	120°
GSD-7915HS	15W	164*164*47mm	150*150mm	>80	90~280V	1500LM	120°
GSD-7922HS	22W	189*189*47mm	175*175mm	>80	90~280V	2200LM	120°



IP20 F CE COLOR: WH BK SV							
Model	Power	Size	Cut-out size	CRI	Input	Luminous Flux	Beam angle
GSD-3508R	6W	Ø110*27mm	Ø97mm	>80	90~280V	800LM	120°
GSD-3512R	12W	Ø145*27mm	Ø130mm	>80	90~280V	1200LM	120°
GSD-3518R	18W	Ø176*25mm	Ø160mm	>80	90~280V	1800LM	120°




IP20 F CE COLOR: WH BK SV							
Model	Power	Size	Cut-out size	CRI	Input	Luminous Flux	Beam angle
GSD-3508S	6W	110*110*23mm	94*94mm	>80	90~280V	800LM	120°
GSD-3512S	12W	141*141*23mm	127*127mm	>80	90~280V	1200LM	120°
GSD-3518S	18W	176*176*25mm	158*158mm	>80	90~280V	1800LM	120°

INDOOR LIGHT



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle
GSD-4008R	7W	Ø88*23mm	Ø75mm	>80	90~280V	800LM	120°
GSD-4015R	14W	Ø145*23mm	Ø130mm	>80	90~280V	1500LM	120°
GSD-4022R	18W	Ø170*23mm	Ø155mm	>80	90~280V	2200LM	120°
GSD-4030R	25W	Ø221*23mm	Ø200mm	>80	90~280V	3000LM	120°



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle
GSD-4008S	7W	88*88*23mm	75*75mm	>80	90~280V	800LM	120°
GSD-4015S	14W	145*145*23mm	130*130mm	>80	90~280V	1500LM	120°
GSD-4022S	18W	170*170*23mm	155*155mm	>80	90~280V	2200LM	120°
GSD-4030S	25W	221*221*23mm	200*200mm	>80	90~280V	3000LM	120°



COLOR: ☐ WH ☐ BK ☐ SV


Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle
GSD-4108R	8W	Ø103*33mm	Ø95mm	>80	90~280V	800LM	120°
GSD-4115R	15W	Ø145*33mm	Ø135mm	>80	90~280V	1500LM	120°
GSD-4122R	22W	Ø170*33mm	Ø160mm	>80	90~280V	2200LM	120°




COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle
GSD-4108S	8W	103*103*33mm	95*95mm	>80	90~280V	800LM	120°
GSD-4115S	15W	145*145*33mm	135*135mm	>80	90~280V	1500LM	120°
GSD-4122S	22W	170*170*33mm	160*160mm	>80	90~280V	2200LM	120°


GSD-4008R




GSD-4008S



GSD-4108R



GSD-4108S



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle
GSD-4808R	7W	Ø99*12mm	Ø80mm	>80	90~280V	800LM	120°
GSD-4815R	14W	Ø149*13mm	Ø130mm	>80	90~280V	1500LM	120°
GSD-4822R	18W	Ø174*13mm	Ø155mm	>80	90~280V	2200LM	120°
GSD-4830R	25W	Ø218*13mm	Ø200mm	>80	90~280V	3000LM	120°



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle
GSD-4808S	7W	99*99*12mm	80*80mm	>80	90~280V	800LM	120°
GSD-4815S	14W	149*149*13mm	130*130mm	>80	90~280V	1500LM	120°
GSD-4822S	18W	174*174*13mm	155*155mm	>80	90~280V	2200LM	120°
GSD-4830S	25W	218*218*13mm	200*200mm	>80	90~280V	3000LM	120°



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle
GSD-5508R	8W	Ø104*21mm	Ø90mm	>80	90~280V	800LM	120°
GSD-5515R	15W	Ø157*21mm	Ø145mm	>80	90~280V	1500LM	120°
GSD-5522R	22W	Ø184*21mm	Ø175mm	>80	90~280V	2200LM	120°




COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle
GSD-5508S	8W	104*104*21mm	90*90mm	>80	90~280V	800LM	120°
GSD-5515S	15W	157*157*21mm	145*145mm	>80	90~280V	1500LM	120°
GSD-5522S	22W	184*184*21mm	175*175mm	>80	90~280V	2200LM	120°


GSD-4808R




GSD-4808S




GSD-5508R



GSD-5508S



INDOOR LIGHT




COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle
GSD-6508R	8W	Ø96*22mm	Ø85mm	>80	90~280V	800LM	120°
GSD-6515R	12W	Ø154*22mm	Ø142mm	>80	90~280V	1500LM	120°
GSD-6522R	22W	Ø185*22mm	Ø173mm	>80	90~280V	2200LM	120°



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle
GSD-6508S	8W	96*96*22mm	85*85mm	>80	90~280V	800LM	120°
GSD-6515S	12W	153*153*22mm	141*141mm	>80	90~280V	1500LM	120°
GSD-6522S	22W	185*185*22mm	173*173mm	>80	90~280V	2200LM	120°



COLOR: ☐ WH ☐ BK ☐ SV


Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle
GSD-7908R	8W	Ø103*27mm	Ø95mm	>80	90~280V	800LM	120°
GSD-7915R	15W	Ø145*27mm	Ø135mm	>80	90~280V	1500LM	120°
GSD-7922R	22W	Ø170*27mm	Ø160mm	>80	90~280V	2200LM	120°




COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle
GSD-7908S	8W	103*103*27mm	95*95mm	>80	90~280V	800LM	120°
GSD-7915S	15W	145*145*27mm	135*135mm	>80	90~280V	1500LM	120°
GSD-7922S	22W	170*170*27mm	160*160mm	>80	90~280V	2200LM	120°


GSD-6508R




GSD-6508S



GSD-7908R



GSD-7908S



INDOOR LIGHT



INDOOR LIGHT



COLOR: WH BK SV

Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle
GSD-9408R	8W	Ø98*12.5mm	Ø75-95mm	>80	90~280V	800LM	120°
GSD-9415R	15W	Ø119*12.5mm	Ø85-115mm	>80	90~280V	1200LM	120°
GSD-9422R	20W	Ø168*12.5mm	Ø95-160mm	>80	90~280V	1800LM	120°



COLOR: WH BK SV

Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle
GSD-9408S	8W	98*98*12.5mm	75*95mm	>80	90~280V	800LM	120°
GSD-9412S	15W	119*119*12.5mm	85*115mm	>80	90~280V	1200LM	120°
GSD-9418S	20W	168*168*12.5mm	95*160mm	>80	90~280V	1800LM	120°



COLOR: WH BK SV


Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle
NGD-1108R	8W	Ø96*24mm	Ø85mm	>80	90~280V	800LM	120°
NGD-1115R	15W	Ø154*24mm	Ø145mm	>80	90~280V	1500LM	120°
NGD-1122R	22W	Ø178*24mm	Ø170mm	>80	90~280V	2200LM	120°




COLOR: WH BK SV

Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle
NGD-1108S	8W	96*96*24mm	85*85mm	>80	90~280V	800LM	120°
NGD-1115S	15W	154*154*24mm	145*145mm	>80	90~280V	1500LM	120°
NGD-1122S	22W	178*178*24mm	170*170mm	>80	90~280V	2200LM	120°


GSD-9408R




GSD-9408S



NGD-1108R



NGD-1108S



INDOOR LIGHT



COLOR: WH BK SV

Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle
NGD-1308R	8W	Ø100*18mm	Ø73mm	>80	90~280V	800LM	120°
NGD-1315R	15W	Ø120*18mm	Ø120mm	>80	90~280V	1500LM	120°
NGD-1322R	22W	Ø170*18.5mm	Ø142mm	>80	90~280V	2200LM	120°
NGD-1330R	30W	Ø225*18.5mm	Ø205mm	>80	90~280V	3000LM	120°



COLOR: WH BK SV

Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle
NGD-1206XR	6W	Ø98*15mm	Ø70-90mm	>80	90~280V	600LM	120°
NGD-1212XR	12W	Ø119*15mm	Ø70-110mm	>80	90~280V	1200LM	120°
NGD-1218XR	22W	Ø168*15mm	Ø90-150mm	>80	90~280V	1800LM	120°
NGD-1230XR	30W	Ø223*15mm	Ø110-190mm	>80	90~280V	3000LM	120°



COLOR: WH BK SV


Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
NGD-0808R	6W	Ø95*19mm	>80	90~280V	800LM	120°
NGD-0815R	6W*2	Ø153*19mm	>80	90~280V	1500LM	120°
NGD-0822R	12W	Ø178*19mm	>80	90~280V	2200LM	120°
NGD-0830R	12W*2	Ø218*19mm	>80	90~280V	3000LM	120°



COLOR: WH BK SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
NGD-0808S	6W	95*95*19mm	>80	90~280V	800LM	120°
NGD-0815S	6W*2	153*153*19mm	>80	90~280V	1500LM	120°
NGD-0822S	12W	178*178*19mm	>80	90~280V	2200LM	120°


NGD-1308R




NGD-1206XR



NGD-0808R



NGD-0808S



INDOOR LIGHT



INDOOR LIGHT



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
NGC-1407AC	7W	Ø50*H70mm	>90	90~280V	630LM	24°/38°
NGC-1410AC	10W	Ø70*H85mm	>90	90~280V	900LM	24°/38°



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
NGC-1507AC	7W	Ø50*H70mm	>90	90~280V	630LM	24°/38°
NGC-1510AC	10W	Ø70*H85mm	>90	90~280V	900LM	24°/38°



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
NGC-1707R	7W	Ø50*87mm	>90	90~280V	630LM	24°/38°
NGC-1712R	12W	Ø70*100mm	>90	90~280V	1080LM	24°/38°



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
NGC-1707S	7W	53*53*90mm	>90	90~280V	630LM	24°/38°
NGC-1712S	12W	73*73*102mm	>90	90~280V	1080LM	24°/38°

NGC-1407AC




NGC-1507AC



NGC-1707R



NGC-1707S




INDOOR LIGHT



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
NGC-1707S-2	7W*2	104*53*90mm	>90	90-280V	1260LM	24°/38°
NGC-1712S-2	12W*2	145*73*102mm	>90	90-280V	2160LM	24°/38°



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
NGC-1807R	7W	Ø50*87mm	>90	90-280V	630LM	24°/38°
NGC-1812R	12W	Ø70*100mm	>90	90-280V	1080LM	24°/38°



COLOR: ☐ WH ☐ BK ☐ SV


Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
NGC-1807S	7W	53*53*90mm	>90	90-280V	630LM	24°/38°
NGC-1812S	12W	73*73*102mm	>90	90-280V	1080LM	24°/38°




COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
NGC-1807S-2	7W*2	104*53*90mm	>90	90-280V	1260LM	24°/38°
NGC-1812S-2	12W*2	145*73*102mm	>90	90-280V	2160LM	24°/38°


NGC-1707S-2




NGC-1807R



NGC-1807S



NGC-1807S-2



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
NGC-1206S	6W	55*55*70mm	>90	90-280V	540LM	36°
NGC-1212S	12W	75*75*90mm	>90	90-280V	1080LM	36°
NGC-1218S	18W	95*95*110mm	>90	90-280V	1620LM	36°
NGC-1230S	30W	115*115*120mm	>90	90-280V	2700LM	36°



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
NGC-1206R	6W	Ø54*70mm	>90	90-280V	540LM	36°
NGC-1212R	12W	Ø74*90mm	>90	90-280V	1080LM	36°
NGC-1218R	18W	Ø94*110mm	>90	90-280V	1620LM	36°
NGC-1230R	30W	Ø115*120mm	>90	90-280V	2700LM	36°



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
NGC-1006R	6W	Ø70*70mm	>90	90-280V	540LM	12°/24°/36°
NGC-1012R	12W	Ø85*85mm	>90	90-280V	1080LM	12°/24°/36°
NGC-1018R	18W	Ø100*100mm	>90	90-280V	1620LM	12°/24°/36°




COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
NGC-0109R	9W	Ø82*108mm	>90	90-280V	810LM	12°/24°/36°
NGC-0116R	16W	Ø105*120mm	>90	90-280V	1440LM	12°/24°/36°


NGC-1206S



NGC-1206R



NGC-1006R



NGC-0109R



INDOOR LIGHT




COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
NGC-0106S	6W	70*70*70mm	>90	90~280V	540LM	12°/24°/36°
NGC-0112S	9W	100*100*90mm	>90	90~280V	810LM	12°/24°/36°
NGC-0118S	18W	100*100*120mm	>90	90~280V	1620LM	12°/24°/36°



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSC-2703R	3W	Ø46*57mm	>90	90~280V	270LM	12°/24°/36°
GSC-2707R	7W	Ø55*60mm	>90	90~280V	630LM	12°/24°/36°
GSC-2712R	12W	Ø68*68mm	>90	90~280V	1080LM	12°/24°/36°
GSC-2720R	20W	Ø90*90mm	>90	90~280V	1800LM	12°/24°/36°
GSC-2730R	30W	Ø110*100mm	>90	90~280V	2700LM	12°/24°/36°



COLOR: ☐ WH ☐ BK ☐ SV


Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSC-2707S	7W	55*55*57mm	>90	90~280V	630LM	12°/24°/36°
GSC-2707S-2	7W*2	110*55*56mm	>90	90~280V	1260LM	12°/24°/36°
GSC-2712S	12W	70*70*70mm	>90	90~280V	1080LM	12°/24°/36°
GSC-2712S-2	12W*2	140*70*70mm	>90	90~280V	2160LM	12°/24°/36°




COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
NGC-2212	12W	Ø54.5*60.5mm	>80	90~280V	1080LM	24°/36°


NGC-0106S




GSC-2712R



GSC-2707S-2



NGC-2212



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
NGC-1607	12W	Ø300*22*44mm	>90	90~280V	1080LM	24°/38°
NGC-1612	24W	Ø595*22*44mm	>90	90~280V	2160LM	24°/38°



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSC-1606	6W	Ø98.5*46mm	>90	90~280V	540LM	12°/24°/36°
GSC-1616	16W	Ø142*46mm	>90	90~280V	1440LM	12°/24°/36°
GSC-1624	24W	Ø165*46mm	>90	90~280V	2160LM	12°/24°/36°



COLOR: ☐ WH ☐ BK ☐ SV


Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
NGC-1303-2	2*1.5W	65*35*55mm	>80	90~280V	80*2LM	36°




COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
NGC-1307-5	5*1.5W	136.5*35*55mm	>80	90~280V	80*5LM	36°


NGC-1607




GSC-1606



NGC-1303-2



NGC-1307-5



INDOOR LIGHT



IP20 F CE COLOR: WH BK SV						
Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
NGC-1315-10	10*1.5W	269*35*55mm	>80	90~280V	80*10LM	36°



IP20 F CE COLOR: WH BK SV						
Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
NGC-1306L-4	4*1.5W	65*69*55mm	>80	90~280V	80*4LM	36°




IP20 F CE COLOR: WH BK SV						
Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
NGC-1315L-10	10*1.5W	137*70*55mm	>80	90~280V	80*10LM	36°




IP20 F CE COLOR: WH BK SV						
Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
NGC-1330L-20	20*1.5W	270*70*55mm	>80	90~280V	80*20LM	36°


NGC-1315-10




NGC-1306L-4



NGC-1315L-10



NGC-1330L-20



IP20 F CE COLOR: WH BK SV						
Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSC-3205S	5W	80*Ø28*70mm	>90	90~280V	450LM	12°/24°/36°



IP20 F CE COLOR: WH BK SV						
Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSC-3205S-2	5W*2	130*Ø28*70mm	>90	90~280V	900LM	12°/24°/36°




IP20 F CE COLOR: WH BK SV						
Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSC-3305S	5W	80*Ø28*70mm	>90	90~280V	450LM	12°/24°/36°




IP20 F CE COLOR: WH BK SV						
Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSC-3305S-2	5W*2	130*Ø28*70mm	>90	90~280V	900LM	12°/24°/36°


GSC-3205S




GSC-3205S-2



GSC-3305S



GSC-3305S-2



INDOOR LIGHT



INDOOR LIGHT



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSC-1208S	8W	88*88*25mm	>80	90~280V	800LM	120°
GSC-1215S	15W	145*145*25mm	>80	90~280V	1500LM	120°
GSC-1222S	22W	170*170*25mm	>80	90~280V	2200LM	120°
GSC-1230S	30W	221*221*25mm	>80	90~280V	3000LM	120°



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSC-1308R	8W	Ø100*16mm	>80	90~280V	800LM	120°
GSC-1315R	16W	Ø150*16mm	>80	90~280V	1500LM	120°
GSC-1322R	22W	Ø175*16mm	>80	90~280V	2200LM	120°
GSC-1330R	30W	Ø220*16mm	>80	90~280V	3000LM	120°



COLOR: ☐ WH ☐ BK ☐ SV


Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSC-1308S	8W	88*88*30mm	>80	90~280V	800LM	120°
GSC-1315S	15W	145*145*30mm	>80	90~280V	1500LM	120°
GSC-1322S	22W	175*175*30mm	>80	90~280V	2200LM	120°
GSC-1330S	30W	221*221*30mm	>80	90~280V	3000LM	120°




COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
NGC-1108R	8W	Ø96*32mm	>80	90~280V	800LM	120°
NGC-1115R	15W	Ø155*35mm	>80	90~280V	1500LM	120°
NGC-1122R	22W	Ø180*35mm	>80	90~280V	2200LM	120°


GSC-1208S




GSC-1308R



GSC-1308S



NGC-1108R



INDOOR LIGHT



IP20F□CCCÉ

COLOR:

WHBKSV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
NGC-1108S	8W	95*95*32mm	>80	90~280V	800LM	120°
NGC-1115S	15W	153*153*35mm	>80	90~280V	1500LM	120°
NGC-1122S	22W	178*178*35mm	>80	90~280V	2200LM	120°



IP20F□CCCÉ

COLOR:

WHBKSV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSC-1008S	8W	113*113*33mm	>80	90~280V	800LM	120°
GSC-1016S	16W	168*168*33mm	>80	90~280V	1600LM	120°
GSC-1024S	24W	218*218*33mm	>80	90~280V	2400LM	120°
GSC-1035S	35W	300*300*40mm	>80	90~280V	3500LM	120°



IP20F□CCCÉ

COLOR:

WHBKSV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSC-1008R	8W	Ø113*33mm	>80	90~280V	800LM	120°
GSC-1016R	16W	Ø168*33mm	>80	90~280V	1600LM	120°
GSC-1024R	24W	Ø218*33mm	>80	90~280V	2400LM	120°
GSC-1035R	35W	Ø300*40mm	>80	90~280V	3500LM	120°






IP20F□CCCÉ

COLOR:

WHBKSV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSC-1208R	8W	Ø88*25mm	>80	90~280V	800LM	120°
GSC-1215R	12W	Ø145*25mm	>80	90~280V	1500LM	120°
GSC-1222R	18W	Ø170*25mm	>80	90~280V	2200LM	120°
GSC-1230R	25W	Ø221*25mm	>80	90~280V	3000LM	120°

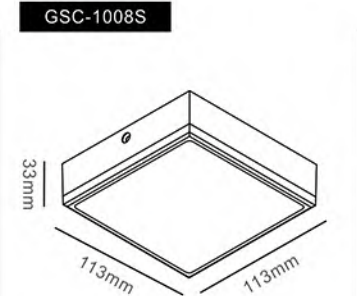

IP20F□CCCÉ

COLOR:

WHBKSV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSC-4108R	8W	Ø98*18mm	>80	90~280V	800LM	120°
GSC-4112R	12W	Ø119*18mm	>80	90~280V	1500LM	120°
GSC-4118R	18W	Ø170*18mm	>80	90~280V	2200LM	120°





IP20F□CCCÉ

COLOR:

WHBKSV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSC-4108S	8W	98*98*18mm	>80	90~280V	800LM	120°
GSC-4112S	12W	119*119*18mm	>80	90~280V	1500LM	120°
GSC-4118S	18W	170*170*18mm	>80	90~280V	2200LM	120°



INDOOR LIGHT



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
NGL-0907	7W	138.5*Φ50*145.6mm	>90	90~280V	630LM	12°/24°/36°
NGL-0912	12W	138.5*Φ50*145.6mm	>90	90~280V	1080LM	12°/24°/36°
NGL-0918	18W	163*Φ65*150mm	>90	90~280V	1620LM	12°/24°/36°



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
NGL-1007	7W	122*145* Ø70mm	>90	90~280V	630LM	24°/38°
NGL-1012	12W	122*163*Ø90mm	>90	90~280V	1080LM	24°/38°





COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
NL-0812C	6W	111*22*114mm	>90	90~280V	540LM	12°/24°/36°



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
NL-0812CS	12W	220*22*114mm	>90	90~280V	1080LM	12°/24°/36°

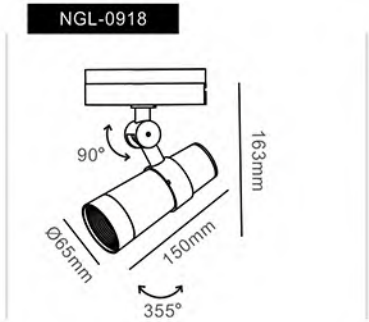

INDOOR LIGHT



IP20

F

CE

COLOR:

WH

BK

SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GS20DX-7W	7W	Ø30*300*85*117mm	>90	90~280V	630LM	12°/24°/36°
GS20DX-12W	12W	Ø50*300*85*117mm	>90	90~280V	1080LM	12°/24°/36°



IP20

F

CE

COLOR:

WH

BK

SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GS20F-48P	12W	300*22*25mm	>80	90~280V	1080LM	12°/24°/36°
GS20F-96P	24W	595*22*25mm	>80	90~280V	2160LM	12°/24°/36°
GS20F-144P	36W	900*22*25mm	>80	90~280V	3240LM	12°/24°/36°
GS20F-192P	48W	1200*22*25mm	>80	90~280V	4320LM	12°/24°/36°



IP20

F

CE

COLOR:

WH

BK

SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GS20G-6P	6W	111*22*25mm	>80	90~280V	540LM	12°/24°/36°
GS20G-12P	12W	219*22*25mm	>80	90~280V	1080LM	12°/24°/36°
GS20G-18P	18W	328*22*25mm	>80	90~280V	1620LM	12°/24°/36°
GS20G-24P	24W	438*22*25mm	>80	90~280V	2160LM	12°/24°/36°



IP20

F

CE

COLOR:

WH

BK

SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GS20Z-6P	6W	112*22*85mm	>80	90~280V	540LM	12°/24°/36°
GS20Z-12P	12W	220*22*85mm	>80	90~280V	1080LM	12°/24°/36°

INDOOR LIGHT



IP20

F

CE

COLOR:

WH

BK

SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GS20G-3W	3W	Ø31*90mm	>90	90~280V	270LM	12°/24°/36°
GS20G-7W	7W	Ø36*80mm	>90	90~280V	630LM	12°/24°/36°
GS20G-12W	12W	Ø48*118mm	>90	90~280V	1080LM	12°/24°/36°
GS20G-18W	18W	Ø58*155mm	>90	90~280V	1620LM	12°/24°/36°
GS20G-25W	25W	Ø68*155mm	>90	90~280V	2250LM	12°/24°/36°



IP20

F

CE

COLOR:

WH

BK


SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GS20P-6P	6W	L111*W22*H25mm	>80	90~280V	480LM	12°/24°/36°
GS20P-12P	12W	L219*W22*H25mm	>80	90~280V	960LM	12°/24°/36°
GS20P-18P	18W	L328*W22*H25mm	>80	90~280V	1440LM	12°/24°/36°

INDOOR LIGHT



Model	Size
NGL-CA1M	62.5*16.97*1.5mm
NGL-CA2M	62.5*16.97*1.5mm
NGL-CA3M	62.5*16.97*1.5mm

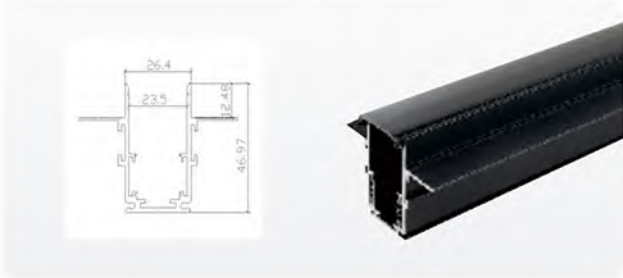

Model	Size
NGL-TA3M	51*27*1.5mm
NGL-TA3M	51*27*1.5mm
NGL-TA3M	51*27*1.5mm



Model	Size
NGL-MZ80MM	80*80mm



Model	Size
NGL-AZ80MM	80*80mm



Model	Size
GS27L	2 copper wire




Model	Size
GS28L	2 copper wire




Model	Size
GS29L	2 copper wire

INDOOR LIGHT

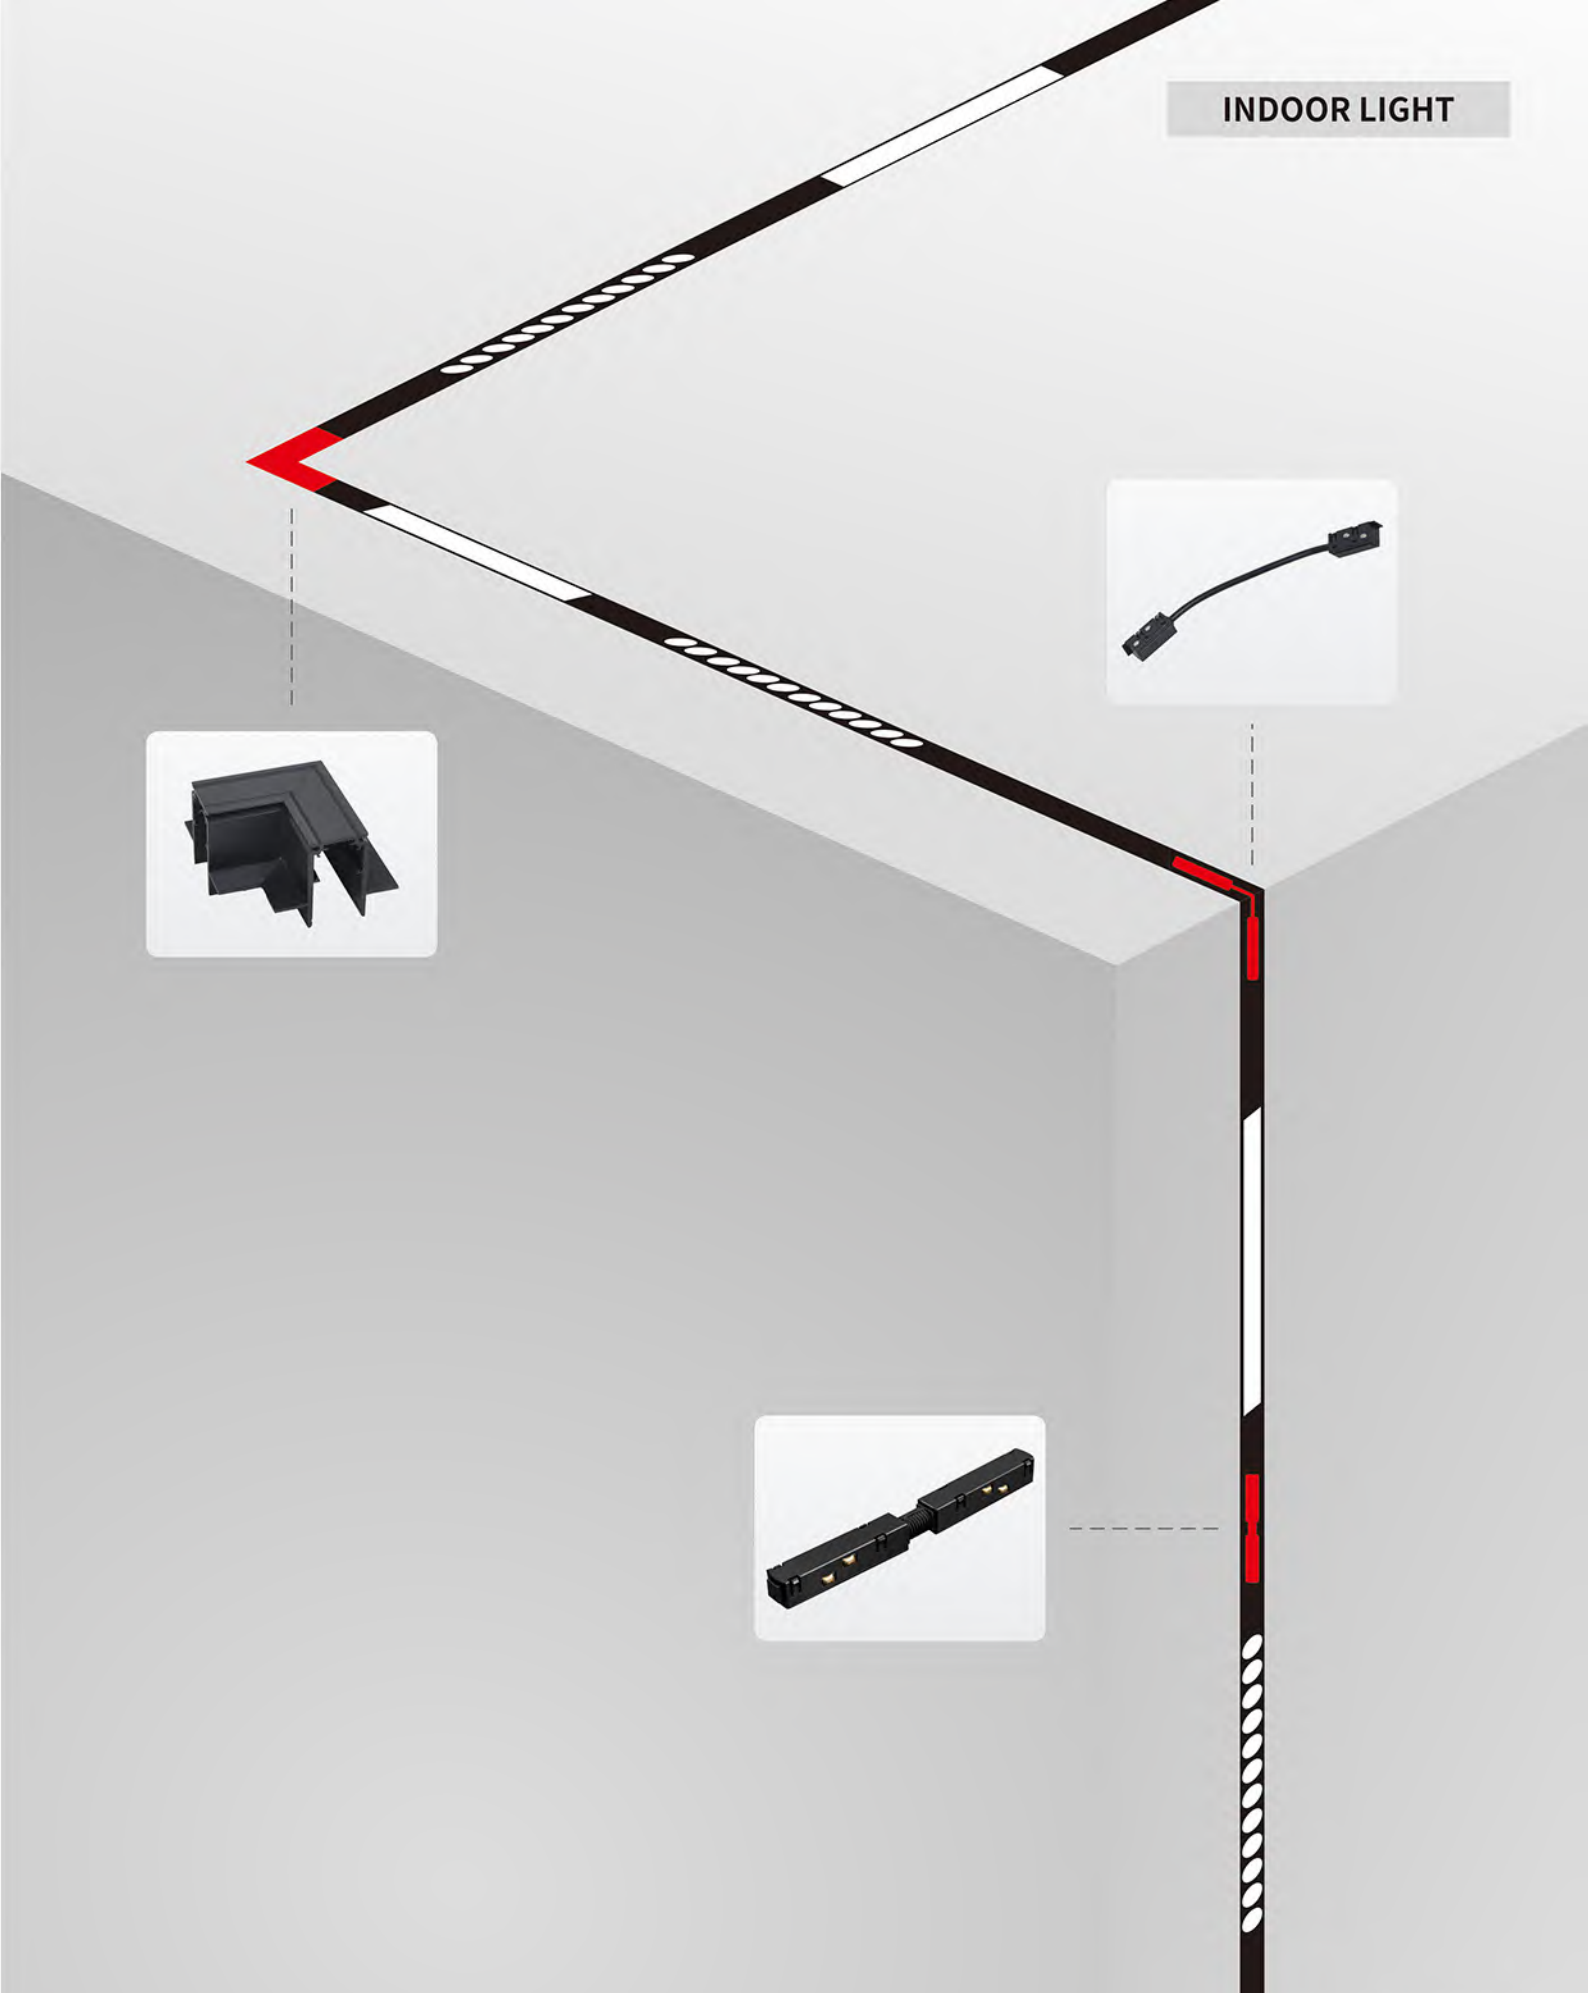

INDOOR LIGHT

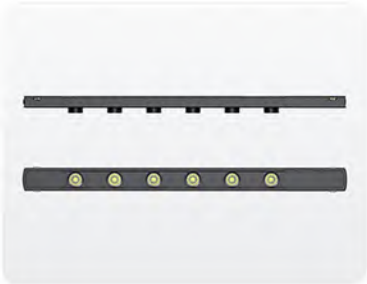

IP20

F

CE

COLOR:

WH

BK

SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GS23L-10W	10W	L400*W22*H11	Ra90	90~280V	900LM	12°/24°/36°
GS23L-20W	20W	L600*W22*H11	Ra90	90~280V	1800LM	12°/24°/36°



IP20

F

CE

COLOR:

WH

BK

SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GS24L-10W	10W	L300*W22*H11mm	>90	90~280V	900LM	12°/24°/36°
GS24L-20W	20W	L530*W22*H11mm	>90	90~280V	1800LM	12°/24°/36°



IP20

F

CE

COLOR:

WH

BK

SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GS26-6W	6W	L125*W22*H25mm	>90	90~280V	540LM	12°/24°/36°
GS26-12W	12W	L235*W22*H25mm	>90	90~280V	1080LM	12°/24°/36°



IP20

F

CE

COLOR:

WH

BK

SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GS36-6W	2W*3	230*35*51mm	>90	90~280V	540LM	12°/24°/36°



IP20

F

CE

COLOR:

WH

BK

SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GS38-7W	7W	Ø36*80mm	>90	90~280V	630LM	12°/24°/36°
GS38-12W	12W	Ø48*105mm	>90	90~280V	1080LM	12°/24°/36°

INDOOR LIGHT



Model	Size
GS30GD	27*H7mm*2.0



Model	Size
GS33Y	40mm



Model	Power
GS39	100W
GS39L	200W



Model	Size
GS31D	40mm



Model	Size
GS34T	80*40mm



Model	Power
GS40-100W	100W
GS40-200W	200W



Model	Size
GS32L	40*40mm



Model	Size
GS35S	80*80mm



IP20 F □ CCC CE

COLOR: ☐ WH ☒ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GST-1607	7W	Ø50*114.5*177mm	>90	90~280V	630 LM	12°/24°/36°
GST-1612	12W	Ø50*134.5*177mm	>90	90~280V	1080 LM	12°/24°/36°
GST-1618	18W	Ø65*149*182.5mm	>90	90~280V	1620 LM	12°/24°/36°
GST-1630	30W	Ø65*160*182.5mm	>90	90~280V	2700 LM	12°/24°/36°



IP20 F □ CCC CE

COLOR: ☐ WH ☒ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
NGT-1107	7W	119*Ø50*132.6mm	>90	90~280V	630LM	12°/24°/36°
NGT-1112	12W	150*Ø65*139.5mm	>90	90~280V	1080LM	12°/24°/36°



IP20 F □ CCC CE

COLOR: ☐ WH ☒ BK ☐ SV




Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
NGT-0707	7W	Ø70*133mm	>90	90~280V	630LM	24°/38°
NGT-0712	12W	Ø90*153mm	>90	90~280V	1080LM	24°/38°



IP20 F □ CCC CE

COLOR: ☐ WH ☒ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
NGT-0112	12W	Ø62*150mm	>90	90~280V	1080LM	12°/24°/36°
NGT-0118	18W	Ø62*150mm	>90	90~280V	1620LM	12°/24°/36°
NGT-0132	30W	Ø90*165mm	>90	90~280V	2700LM	12°/24°/36°

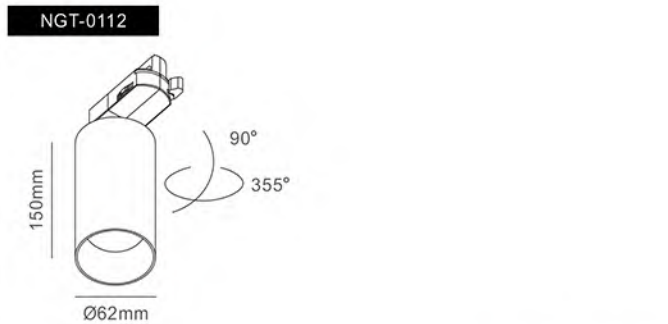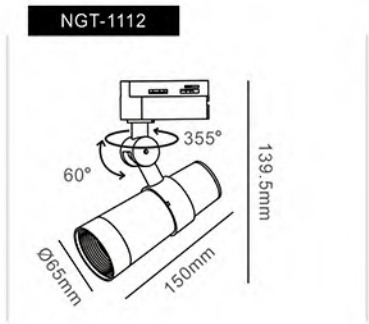

INDOOR LIGHT



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
NGT-0510R	10W	Ø54*100mm	>90	90~280V	900LM	36°
NGT-0520R	20W	Ø75*120mm	>90	90~280V	1800LM	36°
NGT-0530R	30W	Ø94*150mm	>90	90~280V	2700LM	36°



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
NGT-0212S	12W	110*110*115*48mm	>90	90~280V	1080LM	12°/24°/36°
NGT-0218S	18W	110*110*155*48mm	>90	90~280V	1620LM	12°/24°/36°



COLOR: ☐ WH ☐ BK ☐ SV


Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
NGT-0212R	12W	Ø110*155*48mm	>90	90~280V	1080LM	12°/24°/36°
NGT-0218R	18W	Ø110*155*48mm	>90	90~280V	1620LM	12°/24°/36°




COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
NGT-0312	12W	Ø78*120*60mm	>90	90~280V	1080LM	12°/24°/36°
NGT-0318	18W	Ø78*120*60mm	>90	90~280V	1620LM	12°/24°/36°
NGT-0332	32W	Ø106*130*75mm	>90	90~280V	2700LM	12°/24°/36°


NGT-0212S



NGT-0212R



NGT-0312



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSC-2912	12W	Ø60*180mm	>90	90~280V	1080LM	12°/24°/36°



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
NGC-0710R	10W	Ø54*100mm	>90	90~280V	900LM	36°
NGC-0720R	20W	Ø75*120mm	>90	90~280V	1800LM	36°
NGC-0730R	30W	Ø94*150mm	>90	90~280V	2700LM	36°



COLOR: ☐ WH ☐ BK ☐ SV


Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
NGC-0206	6W	Ø45*102*45mm	>90	90~280V	540LM	12°/24°/36°
NGC-0206H	6W	Ø45*200*45mm	>90	90~280V	540LM	12°/24°/36°
NGC-0212	12W	Ø62*120*45mm	>90	90~280V	1080LM	12°/24°/36°
NGC-0218	18W	Ø62*150*45mm	>90	90~280V	1620LM	12°/24°/36°




COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
NGC-0606GD	6W	Ø45*265mm	>90	90~280V	540LM	12°/24°/36°
NGC-0609	9W	Ø62*150mm	>80	90~280V	810LM	12°/24°/36°
NGC-0609GD-H	9W	Ø62*315mm	>90	90~280V	540LM	12°/24°/36°

GSC-2912




NGC-0720R



NGC-0206



NGC-0606GD



INDOOR LIGHT



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
NGC-0412S	12W	110*110*200mm	>90	90~280V	1080LM	12°/24°/36°
NGC-0418S	18W	110*110*200mm	>90	90~280V	1620LM	12°/24°/36°



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
NGC-0412R	12W	Ø110*100*200mm	>90	90~280V	1080LM	12°/24°/36°
NGC-0418R	18W	Ø110*100*200mm	>90	90~280V	1620LM	12°/24°/36°



COLOR: ☐ WH ☐ BK ☐ SV


Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSP-0205-6	5W	Ø51*600mm	>90	90~280V	450LM	12°/24°/36°
GSP-0208-3	8W	Ø51*300mm	>90	90~280V	720LM	12°/24°/36°
GSP-0212-2	12W	Ø51*200mm	>90	90~280V	1080LM	12°/24°/36°




COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
NGP-0530	36W	50*70*1185mm	>80	90~280V	2700LM	90°


NGC-0412S



NGC-0412R



NGP-0530



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSP-0305	5W	325*22*9mm	>80	90~280V	450LM	36°
GSP-0308	8W	585*22*9mm	>80	90~280V	720LM	36°
GSP-0312	12W	885*22*9mm	>80	90~280V	1080LM	36°
GSP-0318	18W	1228*22*9mm	>80	90~280V	1620LM	36°



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
NGP-0106	6W	Ø120*50*1400mm	>90	90~280V	540LM	12°/24°/36°



COLOR: ☐ WH ☐ BK ☐ SV


Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSP-0407	7W	Ø70*95*1000mm	>90	90~280V	630LM	24°/38°
GSP-0412	12W	Ø90*115*1000mm	>90	90~280V	1080LM	24°/38°




COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
NGP-0612	12W	496*Ø80*1300mm	>80	90~280V	960LM	12°/24°/36°


GSP-0305




NGP-0106



GSP-0412



NGP-0606



INDOOR LIGHT



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSP-0305	5W	325*22*9mm	>80	90~280V	450LM	36°
GSP-0308	8W	585*22*9mm	>80	90~280V	720LM	36°
GSP-0312	12W	885*22*9mm	>80	90~280V	1080LM	36°
GSP-0318	18W	1228*22*9mm	>80	90~280V	1620LM	36°



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
NGP-0106	6W	Ø120*50*1400mm	>90	90~280V	540LM	12°/24°/36°



COLOR: ☐ WH ☐ BK ☐ SV


Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSP-0407	7W	Ø70*95*1000mm	>90	90~280V	630LM	24°/38°
GSP-0412	12W	Ø90*115*1000mm	>90	90~280V	1080LM	24°/38°




COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
NGP-0612	12W	496*Ø80*1300mm	>80	90~280V	960LM	12°/24°/36°


GSP-0305




NGP-0106



GSP-0412



NGP-0606





COLOR: ☐ WH ☒ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSG-2807SF	7W	119*Ø50*122.6mm	>90	90~280V	630LM	12°/24°/36°
GSG-2812SF	12W	119*Ø50*122.6mm	>90	90~280V	1080LM	12°/24°/36°
GSG-2818SF	18W	150* Ø65*136mm	>90	90~280V	1620LM	12°/24°/36°



COLOR: ☐ WH ☒ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSG-2807SFA	7W	119*Ø50*113mm	>90	90~280V	630LM	12°/24°/36°
GSG-2812SFA	12W	119*Ø50*113mm	>90	90~280V	1080LM	12°/24°/36°
GSG-2818SFA	18W	150*Ø65*126mm	>90	90~280V	1620LM	12°/24°/36°



COLOR: ☐ WH ☒ BK ☐ SV


Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSG-2807X	7W	119*Ø50*275mm	>90	90~280V	630LM	12°/24°/36°
GSG-2812X	12W	119*Ø50*275mm	>90	90~280V	1080LM	12°/24°/36°
GSG-2818X	18W	150*Ø65*295mm	>90	90~280V	1620LM	12°/24°/36°




COLOR: ☐ WH ☒ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSG-2807H	7W	119*Ø50*833mm	>90	90~280V	630LM	12°/24°/36°
GSG-2812H	12W	119*Ø50*833mm	>90	90~280V	1080LM	12°/24°/36°
GSG-2818H	18W	150*Ø65*833mm	>90	90~280V	1620LM	12°/24°/36°


GSG-2812SF




GSG-2812SFA




GSG-2807X



GSG-2807H



OUTDOOR LIGHT



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSG-2703SF	3W	Ø37*93*140 Ø60mm	>90	90~280V	270LM	12°/24°/36°
GSG-2707SF	7W	Ø52*112*155*Ø80mm	>90	90~280V	630LM	12°/24°/36°
GSG-2712SF	12W	Ø52*125*155*Ø80mm	>90	90~280V	1080LM	12°/24°/36°



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSG-2703SFC	3W	Ø37*108*155*Ø60mm	>90	90~280V	270LM	12°/24°/36°
GSG-2707SFC	7W	Ø52*132*175*Ø80mm	>90	90~280V	630LM	12°/24°/36°
GSG-2712SFC	12W	Ø52*145*175*Ø80mm	>90	90~280V	1080LM	12°/24°/36°



COLOR: ☐ WH ☐ BK ☐ SV


Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSG-2703SFA	3W	Ø37*93*125mm	>90	90~280V	270LM	12°/24°/36°
GSG-2707SFA	7W	Ø52*112*140mm	>90	90~280V	630LM	12°/24°/36°
GSG-2712SFA	12W	Ø52*125*140mm	>90	90~280V	1080LM	12°/24°/36°




COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSG-2703SFCA	3W	Ø37*108*140mm	>90	90~280V	270LM	12°/24°/36°
GSG-2707SFCA	7W	Ø52*132*160mm	>90	90~280V	630LM	12°/24°/36°
GSG-2712SFCA	12W	Ø52*145*160mm	>90	90~280V	1080LM	12°/24°/36°


GSG-2712SF




GSG-2712SFC



GSG-2703SFA



GSG-2703SFCA



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSG-2703X	3W	Ø37*93*262mm	>90	90~280V	270LM	12°/24°/36°
GSG-2707X	7W	Ø52*112*277mm	>90	90~280V	630LM	12°/24°/36°
GSG-2712X	12W	Ø52*125*277mm	>90	90~280V	1080LM	12°/24°/36°



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSG-2703X1	3W	Ø37*93*422mm	>90	90~280V	270LM	12°/24°/36°
GSG-2707X1	7W	Ø52*112*437mm	>90	90~280V	630LM	12°/24°/36°
GSG-2712X1	12W	Ø52*125*437mm	>90	90~280V	1080LM	12°/24°/36°
GSG-2703X2	3W	Ø37*93*618mm	>90	90~280V	270LM	12°/24°/36°
GSG-2707X2	7W	Ø52*112*633mm	>90	90~280V	630LM	12°/24°/36°
GSG-2712X2	12W	Ø52*125*633mm	>90	90~280V	1080LM	12°/24°/36°



COLOR: ☐ WH ☐ BK ☐ SV


Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSG-2703XC	3W	Ø37*108*262mm	>90	90~280V	270LM	12°/24°/36°
GSG-2707XC	7W	Ø52*132*277mm	>90	90~280V	630LM	12°/24°/36°
GSG-2712XC	12W	Ø52*145*277mm	>90	90~280V	1080LM	12°/24°/36°




COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSG-2703XC1	3W	Ø37*108*422	>90	90~280V	270LM	12°/24°/36°
GSG-2707XC1	7W	Ø52*132*437	>90	90~280V	630LM	12°/24°/36°
GSG-2712XC1	12W	Ø52*145*437	>90	90~280V	1080LM	12°/24°/36°
GSG-2703XC2	3W	Ø37*108*618	>90	90~280V	270LM	12°/24°/36°
GSG-2707XC2	7W	Ø52*132*633	>90	90~280V	630LM	12°/24°/36°
GSG-2712XC2	12W	Ø52*145*633	>90	90~280V	1080LM	12°/24°/36°


GSG-2703X




GSG-2703X1



GSG-2703XC



GSG-2703XC1



OUTDOOR LIGHT



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSG-2703X	3W	Ø37*93*262mm	>90	90~280V	270LM	12°/24°/36°
GSG-2707X	7W	Ø52*112*277mm	>90	90~280V	630LM	12°/24°/36°
GSG-2712X	12W	Ø52*125*277mm	>90	90~280V	1080LM	12°/24°/36°



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSG-2703X1	3W	Ø37*93*422mm	>90	90~280V	270LM	12°/24°/36°
GSG-2707X1	7W	Ø52*112*437mm	>90	90~280V	630LM	12°/24°/36°
GSG-2712X1	12W	Ø52*125*437mm	>90	90~280V	1080LM	12°/24°/36°
GSG-2703X2	3W	Ø37*93*618mm	>90	90~280V	270LM	12°/24°/36°
GSG-2707X2	7W	Ø52*112*633mm	>90	90~280V	630LM	12°/24°/36°
GSG-2712X2	12W	Ø52*125*633mm	>90	90~280V	1080LM	12°/24°/36°



COLOR: ☐ WH ☐ BK ☐ SV


Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSG-2703XC	3W	Ø37*108*262mm	>90	90~280V	270LM	12°/24°/36°
GSG-2707XC	7W	Ø52*132*277mm	>90	90~280V	630LM	12°/24°/36°
GSG-2712XC	12W	Ø52*145*277mm	>90	90~280V	1080LM	12°/24°/36°




COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSG-2703XC1	3W	Ø37*108*422	>90	90~280V	270LM	12°/24°/36°
GSG-2707XC1	7W	Ø52*132*437	>90	90~280V	630LM	12°/24°/36°
GSG-2712XC1	12W	Ø52*145*437	>90	90~280V	1080LM	12°/24°/36°
GSG-2703XC2	3W	Ø37*108*618	>90	90~280V	270LM	12°/24°/36°
GSG-2707XC2	7W	Ø52*132*633	>90	90~280V	630LM	12°/24°/36°
GSG-2712XC2	12W	Ø52*145*633	>90	90~280V	1080LM	12°/24°/36°


GSG-2703X




GSG-2703X1



GSG-2703XC



GSG-2703XC1



OUTDOOR LIGHT



OUTDOOR LIGHT



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GOW-0306	6W	123*52*85mm	>80	90~280V	480LM	12°/24°/36°
GOW-0312	12W	234*52*85mm	>80	90~280V	960LM	12°/24°/36°



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GOW-0306-2	6W*2	123*82*85mm	>80	90~280V	480*2LM	12°/24°/36°
GOW-03012-2	12W*2	234*82*85mm	>80	90~280V	960*2LM	12°/24°/36°



COLOR: ☐ WH ☐ BK ☐ SV


Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSG-2306X	6W	123*52*255mm	>80	90~280V	480LM	12°/24°/36°
GSG-2312X	12W	234*52*255mm	>80	90~280V	960LM	12°/24°/36°




COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSG-2306X-2	6W*2	123*82*255mm	>80	90~280V	480*2LM	12°/24°/36°
GSG-2312X-2	12W*2	234*82*255mm	>80	90~280V	960*2LM	12°/24°/36°

GOW-0306



GSG-2312X-2



OUTDOOR LIGHT




COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSG-2203	3W	Ø70*95mm	>90	90~280V	240LM	24°/38°
GSG-2207	7W	Ø70*95mm	>90	90~280V	560LM	24°/38°
GSG-2212	12W	Ø90*287mm	>90	90~280V	960LM	24°/38°
GSG-2215	15W	Ø90*287mm	>90	90~280V	1200LM	24°/38°



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSG-2203X	3W	Ø70*267mm	>90	90~280V	240LM	24°/38°
GSG-2207X	7W	Ø70*267mm	>90	90~280V	560LM	24°/38°
GSG-2212X	12W	Ø90*287mm	>90	90~280V	960LM	24°/38°
GSG-2215X	15W	Ø90*287mm	>90	90~280V	1200LM	24°/38°



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSG-0106	6W	Ø63*83*88mm	>90	90~280V	480LM	36°
GSG-0112	12W	Ø83*97*111mm	>90	90~280V	960LM	36°




COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSG-0206	6W	100*100*77*131mm	>90	90~280V	480LM	36°
GSG-0212	12W	135*135*93*173mm	>90	90~280V	960LM	36°


GSG-2207




GSG-2215X



GSG-0106



GSG-0206



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSG-1303XC	3W	49*102*160mm	>90	90~280V	240Lm	36°
GSG-1307XC	7W	64*130*160mm	>90	90~280V	560Lm	36°
GSG-1312XC	12W	64*130*160mm	>90	90~280V	960Lm	36°



COLOR: ☐ WH ☐ BK ☐ SV


Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSG-1303SFX	3W	45*45*270mm	>90	90~280V	240Lm	36°
GSG-1307SFX	7W	65*65*307mm	>90	90~280V	560Lm	36°
GSG-1312SFX	12W	65*65*307mm	>90	90~280V	960Lm	36°



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSG-1303X(spike)	3W	45*68*160mm	>90	90~280V	240Lm	36°
GSG-1307X(spike)	7W	66*100*160mm	>90	90~280V	560Lm	36°
GSG-1312X(spike)	12W	66*100*160mm	>90	90~280V	960Lm	36°

GSG-1303X(spike)



OUTDOOR LIGHT

OUTDOOR LIGHT



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSG-1715	15W	Ø79*153mm	>90	90~280V	1200LM	36°



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSG-1303SFC	3W	45*68mm	>90	90~280V	240Lm	36°
GSG-1307SFC	7W	66*100mm	>90	90~280V	560Lm	36°
GSG-1312SFC	12W	66*100mm	>90	90~280V	960Lm	36°



COLOR: ☐ WH ☐ BK ☐ SV


Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSG-1303SF	3W	45*68mm	>90	90~280V	240Lm	36°
GSG-1307SF	7W	66*100mm	>90	90~280V	560Lm	36°
GSG-1312SF	12W	66*100mm	>90	90~280V	960Lm	36°




COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSG-1307B	7W	Ø66*100mm	>90	90~280V	560Lm	36°


GSG-1303SFC



GSG-1303SF



GSG-1307B



OUTDOOR LIGHT



OUTDOOR LIGHT



OUTDOOR LIGHT



COLOR: ☐ WH ☒ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSG-2506	7W	197*Ø80*462mm	>80	90~280V	480LM	12°/24°/36°



COLOR: ☐ WH ☒ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GOW-1306	6W	221.5*80*101.5mm	>80	90~280V	450LM	12°/24°/36°



COLOR: ☐ WH ☒ BK ☐ SV


Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GOW-1406	7W	179*80*169mm	>80	90~280V	450LM	12°/24°/36°




COLOR: ☐ WH ☒ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GOW-1206-2	6W	418*Ø80*59mm	>80	90~280V	960LM	12°/24°/36°


GSG-2506




GOW-1306



GOW-1406




GOW-1206-2





COLOR: ☐ WH ☐ BK ☐ SV ☐ GD

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GOW-0812	5W*2	114*61.5*93mm	>90	90~280V	640LM	36°
GOW-0820	8W*2	135*76.5*108mm	>90	90~280V	960LM	36°

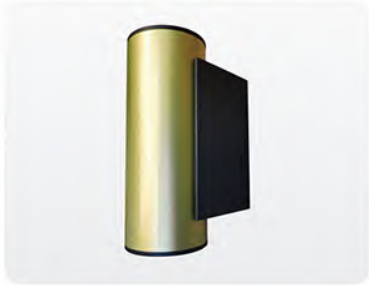

COLOR: ☐ WH ☐ BK ☐ SV ☐ GD

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GOW-0812H	5W*2	144*61.5*93mm	>90	90~280V	640LM	36°
GOW-0820H	8W*2	175*76.5*108mm	>90	90~280V	960LM	36°






COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GOW-1103A	3W	109*50*73.7mm	>80	90~280V	225LM	36°



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GOW-1103B	3W	109*50*73.7mm	>80	90~280V	225LM	36°



OUTDOOR LIGHT



COLOR: ☐ WH ☒ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GOW-1103C	3W	109*50*73.7mm	>80	90~280V	225LM	36°



COLOR: ☐ WH ☒ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GOW-1103D	3W	109*50*73.7mm	>80	90~280V	225LM	36°



COLOR: ☐ WH ☒ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GOW-1103-2A	3W*2	142*50*74mm	>80	90~280V	450LM	36°



COLOR: ☐ WH ☒ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GOW-1103-2D	3W*2	142*50*74mm	>80	90~280V	450LM	36°








COLOR: ☐ WH ☒ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GOW-1103-2AB	3W*2	142*50*74mm	>80	90~280V	450LM	36°



OUTDOOR LIGHT





IP54

F

CE

COLOR:

WH

BK

SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GOW-0103-2	3W*2	56*60*85mm	>90	90~280V	480LM	24°/38°



IP54

F

CE

COLOR:

WH

BK

SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GOW-0203-2	3W*2	56*130*85mm	>90	90~280V	480LM	24°/38°
GOW-0206-2	6W*2	75*160*103mm	>90	90~280V	960LM	24°/38°



IP54

F

CE

COLOR:


WH

BK


SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSW-8912	12W	124*150*49.5mm	>80	90~280V	960LM	/


GOW-0103-2

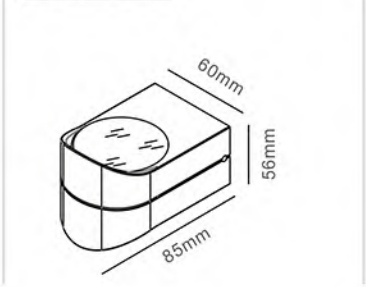

GOW-0206-2



GSW-8912





COLOR: ☐ WH ☒ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSW-9012H	8W	168*150*48mm	>90	90~280V	640LM	100°



COLOR: ☐ WH ☒ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSW-9012	8W	168*150*124mm	>90	90~280V	640LM	100°



COLOR: ☐ WH ☒ BK ☐ SV


Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSW-9103S	3W	160*140*67mm	>80	90~280V	240LM	100°




COLOR: ☐ WH ☒ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSW-9103R	3W	Ø140*67mm	>80	90~280V	240LM	100°


GSW-9012H




GSW-9012



GSW-9103S




GSW-9103R





COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSW-8812	12W	Ø120*55mm	>80	90~280V	960LM	100°

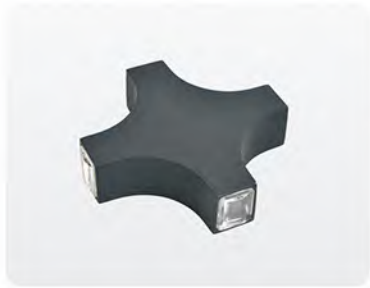

COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSW-7012	3W*4	170*170*40mm	>80	90~280V	960LM	100°



COLOR: ☐ WH ☐ BK ☐ SV


Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSW-6705	5W	80*95*81mm	>90	90~280V	400LM	36°
GSW-6710	10W	80*190*81mm	>90	90~280V	800LM	36°




COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux
GSW-6506	3W*2	85*82*70mm	>80	90~280V	480LM


GSW-8812





GSW-7012




GSW-6705



GSW-6506

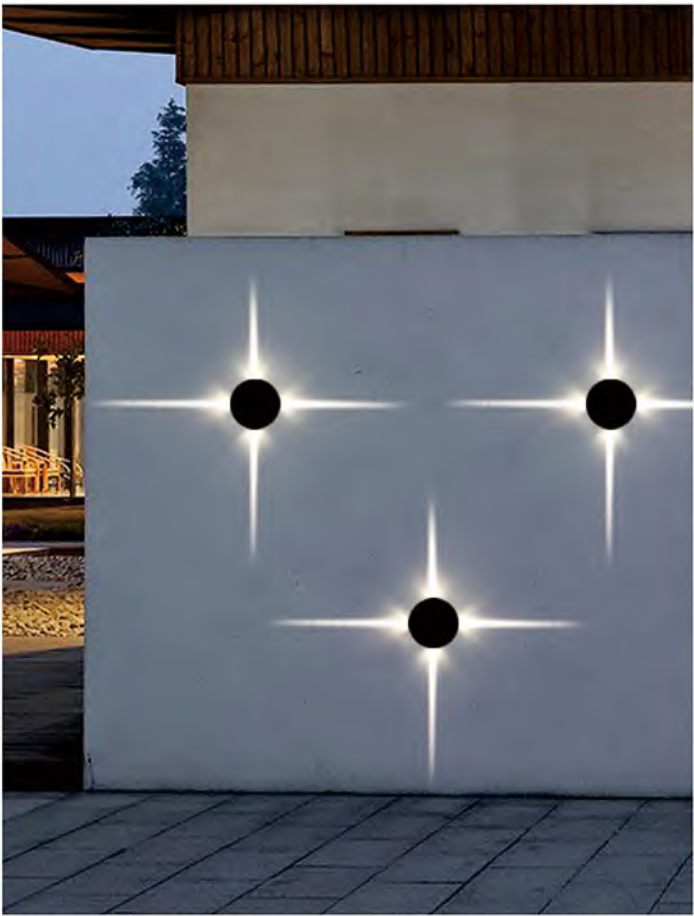

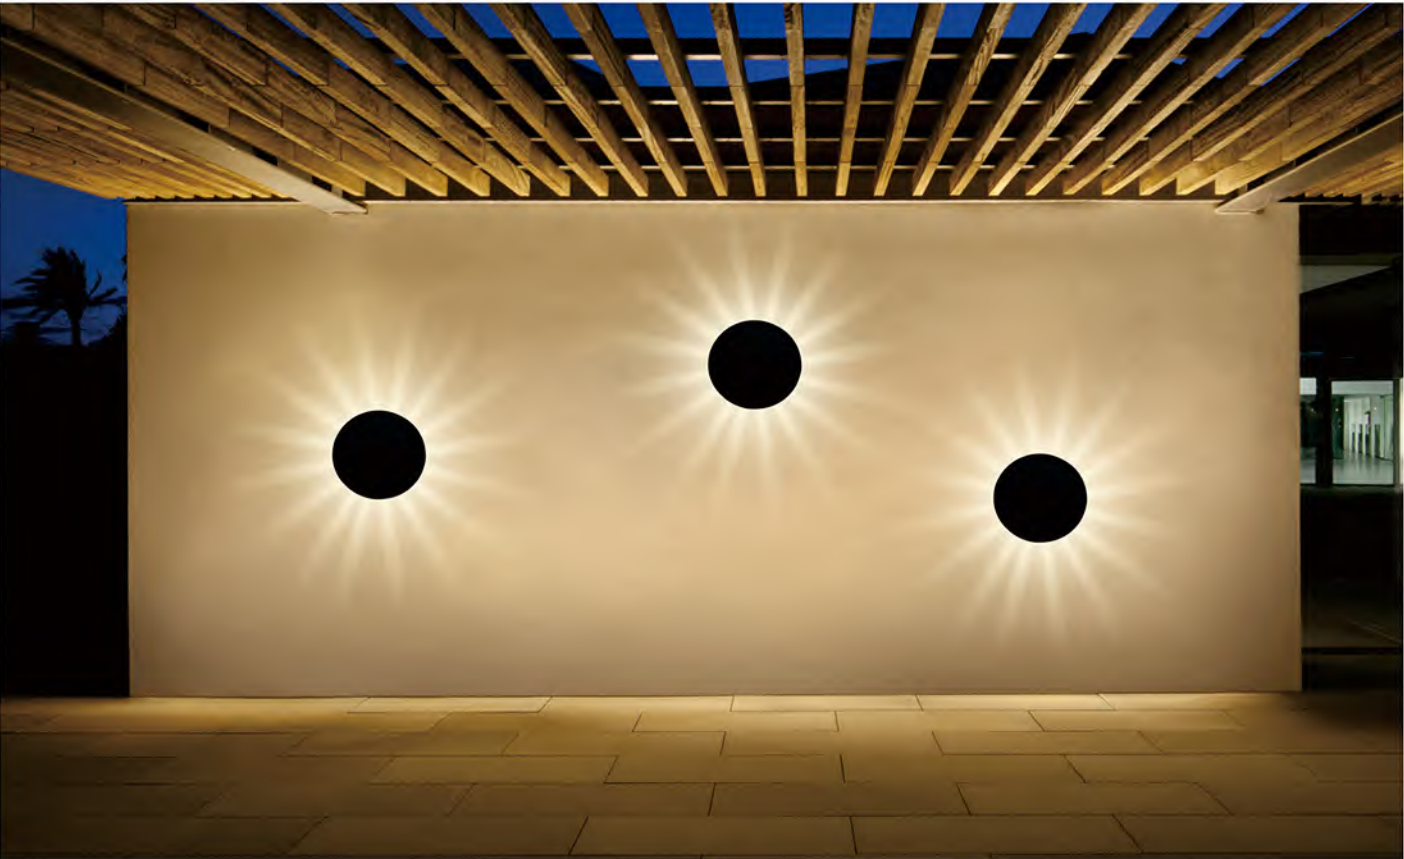

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSW-6304	1W*4	Ø134*43mm	>80	90~280V	320LM	90°
GSW-6308	1W*8	Ø134*43mm	>80	90~280V	640LM	90°
GSW-6316	1W*16	Ø134*43mm	>80	90~280V	1280LM	90°




Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSW-6302S	1W*2	120*95*40mm	>80	90~280V	160LM	12°
GSW-6304S	1W*4	120*95*40mm	>80	90~280V	320LM	12°
GSW-6306S	1W*6	120*95*40mm	>80	90~280V	480LM	12°




Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSW-4401X	1W	70*70*51mm	>80	90~280V	80LM	60°
GSW-4402X	1W*2	70*70*51mm	>80	90~280V	80LM*2	60°
GSW-4404X	1W*4	70*70*51mm	>80	90~280V	80LM*4	60°
GSW-4406X	3W*2	70*70*51mm	>80	90~280V	240LM*2	60°
GSW-4403	3W	90*90*50mm	>80	90~280V	240LM	60°
GSW-4406	3W*2	90*90*50mm	>80	90~280V	240LM*2	60°
GSW-4412	3W*4	90*90*50mm	>80	90~280V	240LM*4	60°
GSW-4412B	3W*4	120*120*69mm	>80	90~280V	240LM*4	60°

GSW-6304



GSW-4402X



OUTDOOR LIGHT



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GOW-1506	6W	105*105*130mm	>80	90~280V	480LM	60°



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GOW-0906	6W	70*70*53mm	>80	90~280V	480LM	60°



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GOW-0506	6W	220*72*90mm	>90	90~280V	480LM	60°



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GOW-0602	2W	105*60*60mm	>80	90~280V	160LM	60°
GOW-0603	3W	165*60*60mm	>80	90~280V	240LM	60°
GOW-0604	4W	225*60*60mm	>80	90~280V	320LM	60°

OUTDOOR LIGHT



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GOW-0704S	4W	95*45*58mm	>80	90~280V	320LM	60°
GOW-0712S	12W	180*75*85mm	>80	90~280V	960LM	60°



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GOW-0704L	4W	95*45*58mm	>80	90~280V	320LM	60°
GOW-0712L	12W	180*75*85mm	>80	90~280V	960LM	60°



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GOW-0704R	4W	95*45*58mm	>80	90~280V	320LM	60°
GOW-0712R	12W	180*75*85mm	>80	90~280V	960LM	60°



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSW-9208	8W	64*40*192mm	>80	90~280V	640Lm	60°



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSW-6006S	6W	78*65*80mm	>90	90~280V	480LM	24°/36°
GSW-6012S	6W*2	151*65*80mm	>90	90~280V	960LM	24°/36°



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSW-6006R	6W	80*68*80mm	>90	90~280V	480LM	24°/36°
GSW-6012R	6W*2	150*68*80mm	>90	90~280V	960LM	24°/36°



COLOR: ☐ WH ☐ BK ☐ SV


Model	Power	Size	CRI	Input	Luminous Flux
GSW-6212	12W	225*125*105mm	>80	90~280V	960LM




COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSW-3903	3W	80*60*37mm	>80	90~280V	240LM	60°
GSW-3906	3W*2	80*60*37mm	>80	90~280V	480LM	60°


GSW-6006S



GSW-6006R



GSW-3903





COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSW-4101X	1W	76*37*77mm	>80	90~280V	80LM	60°
GSW-4102X	1W*2	76*37*77mm	>80	90~280V	160LM	60°
GSW-4104X	1W*4	117*37*80mm	>80	90~280V	320LM	60°
GSW-4106X	1W*6	167*40*80mm	>80	90~280V	480LM	60°
GSW-4108X	1W*8	220*45*80mm	>80	90~280V	640LM	60°



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSW-4309	3W*3	210*47mm	>80	90~280V	480LM	60°





COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSW-4006	3W*2	120*60*40mm	>80	90~280V	480LM	100°
GSW-4006X	3W*2	120*60*40mm	>80	90~280V	480LM	100°
GSW-4012X	6W*2	120*60*40mm	>80	90~280V	480LM*2	100°



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSW-4212	5W*2	114*28*90mm	>80	90~280V	800LM	150°
GSW-4216	7W*2	174*28*90mm	>80	90~280V	960LM	150°



OUTDOOR LIGHT



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSW-4606S	6W	69*110mm	>90	90~280V	480LM	150°
GSW-4612S	6W*2	69*110mm	>90	90~280V	960LM	150°



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSW-4606R	6W	90*69*110mm	>90	90~280V	480LM	150°
GSW-4612R	6W*2	90*69*110mm	>90	90~280V	960LM	150°



COLOR: ☐ WH ☐ BK ☐ SV


Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSW-4512S	5W*2	83*83*110mm	>80	90~280V	800LM	150°




COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSW-4512R	5W*2	90*80*110mm	>80	90~280V	800LM	150°


GSW-4606S




GSW-4606R



GSW-4512S



GSW-4512R



OUTDOOR LIGHT



OUTDOOR LIGHT



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux
GSW-4810	10W	99*14*102mm	>80	90~280V	800LM



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux
GSW-4906	6W	170*83*45mm	>80	90~280V	480LM



COLOR: ☐ WH ☐ BK ☐ SV


Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSW-3605S	5W	80*86*96*105mm	>80	90~280V	400LM	100°
GSW-3605S-2	5W*2	80*132*96*105mm	>80	90~280V	800LM	100°




COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSW-3705R	5W	Ø108*80mm	>80	90~280V	400LM	100°


GSW-4810




GSW-4906



GSW-3605S



GSW-3705R



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSW-3705S	5W	108*108*82mm	>80	90~280V	400LM	100°



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSW-3805R	5W	108*108*82mm	>80	90~280V	400LM	100°



COLOR: ☐ WH ☐ BK ☐ SV


Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSW-3805S	5W	108*108*82mm	>80	90~280V	400LM	100°




COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSW-3505R	5W	Ø108*100mm	>80	90~280V	400LM	100°


GSW-3705S




GSW-3805R



GSW-3805S



GSW-3505R



OUTDOOR LIGHT

OUTDOOR LIGHT



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSW-3505S	5W	108*108*105mm	>80	90~280V	400LM	100°



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSW-3605R	5W	Ø80*86*96*105mm	>80	90~280V	400LM	100°
GSW-3610R2	5W*2	Ø80*132*96*105mm	>80	90~280V	800LM	100°



COLOR: ☐ WH ☐ BK ☐ SV


Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSW-5810	5W*2	70*151mm	>90	90~280V	800LM	100°
GSW-5818	9W*2	100*200mm	>90	90~280V	1440LM	100°




COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSW-5118	18W	Ø124*62mm	>80	90~280V	1440LM	100°


GSW-3505S



GSW-3605R



GSW-5810



OUTDOOR LIGHT



OUTDOOR LIGHT



COLOR: ☐ WH ☒ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSW-5710S	10W	160*160*48mm	>80	90~280V	800LM	90°



COLOR: ☐ WH ☒ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux
GSW-5710R	10W	Ø160*48mm	>80	90~280V	800LM



COLOR: ☐ WH ☒ BK ☐ SV


Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSW-5910	10W	98*98*100mm	>80	90~280V	800LM	90°




COLOR: ☐ WH ☒ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux
GSW-5005	5W	128*144*45mm	>80	90~280V	400LM


GSW-5710S



GSW-5710R



GSW-5005



COLOR: ☐ WH ☒ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux
GSW-2709	9W	Ø108*130mm	>80	90~280V	720LM



COLOR: ☐ WH ☒ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSW-2805	5W	Ø115*60mm	>80	90~280V	400LM	100°



COLOR: ☐ WH ☒ BK ☐ SV


Model	Power	Size	CRI	Input	Luminous Flux
GSW-3415	15W	Ø166*38mm	>80	90~280V	1200LM




COLOR: ☐ WH ☒ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSW-1506	6W	173*54*110*60mm	>80	90~280V	480LM	90°


GSW-2709




GSW-2805



GSW-3415



GSW-1506



OUTDOOR LIGHT



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSW-2003	3W	100*100*51mm	>80	90~280V	240LM	24°
GSW-2006	3W*2	100*100*51mm	>80	90~280V	480LM	24°
GSW-2012	3W*4	100*100*51mm	>80	90~280V	960LM	24°



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSW-2503	3W	81*76*63mm	>80	90~280V	240LM	100°
GSW-2506	3W*2	81*140*63mm	>80	90~280V	480LM	100°



COLOR: ☐ WH ☐ BK ☐ SV


Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSW-2012X	3W*4	100*100*51mm	>80	90~280V	960LM	90°
GSW-2012XS	3W*4	100*100*51mm	>80	90~280V	960LM	90°




COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSW-2102	2W	70*42*92mm	>80	90~280V	160LM	90°
GSW-2104	4W	70*42*150mm	>80	90~280V	320LM	90°


GSW-2003




GSW-2503



GSW-2012X



GSW-2102



OUTDOOR LIGHT



OUTDOOR LIGHT



OUTDOOR LIGHT



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSW-2306	3W*2	90*90*112mm	>80	90~280V	480LM	100°



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSW-2206	3W*2	Ø130*65mm	>80	90~280V	480LM	24°







COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
NGW-0110	5W*2	185*122*50mm	>80	90~280V	900LM	90°



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
NGW-0206	6W	140*165*82mm	>80	90~280V	480LM	100°
NGW-0206H	6W	140*165*94mm	>80	90~280V	480LM	100°
NGW-0212	9W	168*194*82mm	>80	90~280V	720LM	100°
NGW-0212H	9W	168*194*94mm	>80	90~280V	720LM	100°
NGW-0209R	9W	168*194*82mm	>80	90~280V	720LM	100°

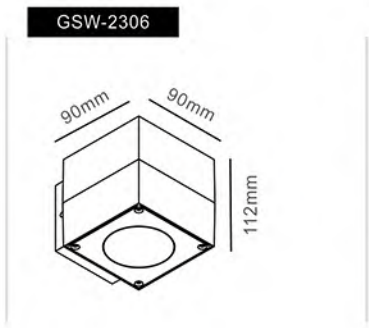

OUTDOOR LIGHT



OUTDOOR LIGHT



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
NGW-0412	6W*2	Ø140*165*82mm	>90	90~280V	960LM	100°




COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
NGW-0506	6W	186*140*50mm	>90	90~280V	480LM	90°







COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
NGW-0506L	6W	186*140*50mm	>90	90~280V	480LM	90°



COLOR: ☐ WH ☐ BK ☐ SV


Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
NGW-0609	9W	180*105*85mm	>90	90~280V	720LM	90°

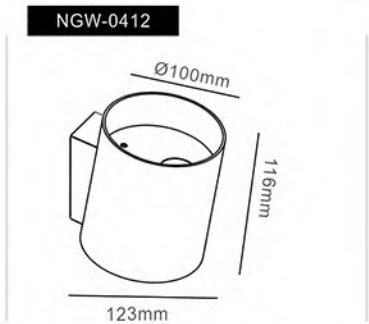

OUTDOOR LIGHT



OUTDOOR LIGHT

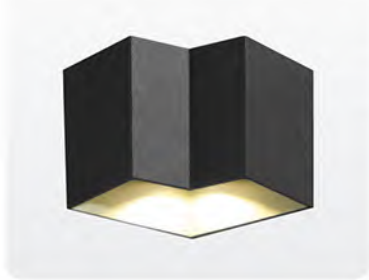

COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
NGW-0709	9W	180*145*85mm	>90	90~280V	720LM	90°



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
NGC-2507	7W	Φ60*61mm	>90	90~280V	630Lm	24°/38°
NGC-2512	12W	Φ75*75mm	>90	90~280V	1080Lm	24°/38°
NGC-2518	18W	Φ90*90mm	>90	90~280V	1620Lm	24°/38°



COLOR: ☐ WH ☐ BK ☐ SV


Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSC-2514S	14W	90*90*136mm	>90	90~280V	1120LM	12°/24°/36°
GSC-2521S	21W	145*145*140mm	>90	90~280V	1680LM	12°/24°/36°




COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSC-2514R	14W	Ø90*136mm	>90	90~280V	1120LM	12°/24°/36°
GSC-2521R	21W	Ø145*140mm	>90	90~280V	1680LM	12°/24°/36°


NGW-0709




NGC-2507



GSC-2514S



GSC-2514R



OUTDOOR LIGHT



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSC-2808S	8W	90*90*46mm	>80	90~280V	640LM	12°/24°/36°
GSC-2815S	15W	140*140*46mm	>80	90~280V	1200LM	12°/24°/36°



COLOR: ☐ WH ☐ BK ☐ SV


Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSC-2808R	8W	Ø90*46mm	>80	90~280V	640LM	12°/24°/36°
GSC-2815R	15W	Ø140*46mm	>80	90~280V	1200LM	12°/24°/36°




COLOR: ☐ WH ☐ BK ☐ SV ☐ GD

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSC-3403	3W	Ø60*15mm	>90	90~280V	270LM	12°/24°/36°
GSC-3407	7W	Ø80.5*16mm	>90	90~280V	630LM	12°/24°/36°
GSC-3415	15W	Ø100.5*16mm	>90	90~280V	1350LM	12°/24°/36°


GSC-2808S



GSC-2808R



GSC-3403



OUTDOOR LIGHT



OUTDOOR LIGHT




COLOR: ☐ WH ☒ BK ☐ SV

Model	Power	Size	CutSize	CRI	Input	Luminous Flux	Beam angle
GSU-0802	1W*2	114*114*65mm	110*110*60mm	>80	90~280V	160LM	30°



COLOR: ☐ WH ☒ BK ☐ SV

Model	Power	Size	CutSize	CRI	Input	Luminous Flux	Beam angle
GSU-0804	1W*4	170*114*65mm	165*110*60mm	>80	90~280V	320LM	30°



COLOR: ☐ WH ☒ BK ☐ SV


Model	Power	Size	CutSize	CRI	Input	Luminous Flux	Beam angle
GSU-0806	1W*6	205*110*60mm	205*110*60mm	>80	90~280V	480LM	30°




COLOR: ☐ WH ☒ BK ☐ SV

Model	Power	Size	CutSize	CRI	Input	Luminous Flux	Beam angle
GSU-1205	5W	124*85*28mm	115*75*40mm	>80	90~280V	400LM	/


GSU-0802




GSU-0804



GSU-0806



GSU-1205



OUTDOOR LIGHT



OUTDOOR LIGHT



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CutSize	CRI	Input	Luminous Flux	Beam angle
GSU-1205S	5W	124*85*28mm	115*75*40mm	>80	90~280V	400LM	/



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CutSize	CRI	Input	Luminous Flux	Beam angle
GSU-0703	3W	86*86*30mm	70*70*45mm	>80	90~280V	240LM	/



COLOR: ☐ WH ☐ BK ☐ SV


Model	Power	Size	CutSize	CRI	Input	Luminous Flux	Beam angle
GSU-0703SS	3W	86*86*30mm	70*70*45mm	>80	90~280V	240LM	/




COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CutSize	CRI	Input	Luminous Flux
GSU-1003	3W	185*45*49mm	180*31*45mm	>80	90~280V	240LM


GSU-1205S




GSU-0703



GSU-0703SS



GSU-1003



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CutSize	CRI	Input	Luminous Flux
GSU-1003SS	3W	185*45*49mm	180*31*45mm	>80	90~280V	240LM



COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CutSize	CRI	Input	Luminous Flux	Beam angle
GSU-0503	3W	75*107*45mm	75*105*45mm	>80	90~280V	240LM	120°



COLOR: ☐ WH ☐ BK ☐ SV


Model	Power	Size	CutSize	CRI	Input	Luminous Flux	Beam angle
GSU-0603	3W	107*75*45mm	105*70*45mm	>80	90~280V	240LM	120°




COLOR: ☐ WH ☐ BK ☐ SV

Model	Power	Size	CutSize	CRI	Input	Luminous Flux
GSU-1407A	7W	Ø78*95mm	Ø75*71mm	>90	90~280V	560LM
GSU-1407B	7W	Ø78*95mm	Ø75*71mm	>90	90~280V	560LM
GSU-1407C	7W	Ø78*95mm	Ø75*71mm	>90	90~280V	560LM
GSU-1407D	7W	Ø78*95mm	Ø75*71mm	>90	90~280V	560LM


GSU-1003SS



GSU-0503



GSU-0603



OUTDOOR LIGHT



IP65	F						
COLOR: ☐ WH ☐ BK ☐ SV							
Model	Power	Size	CutSize	CRI	Input	Luminous Flux	Beam angle
GSU-0306	6W	Ø85*97mm	Ø80*95mm	>90	90~280V	540LM	12°/24°/36°
GSU-0312	12W	Ø110*112mm	Ø105*110mm	>90	90~280V	1080LM	12°/24°/36°




IP65	F						
COLOR: ☐ WH ☐ BK ☐ SV							
Model	Power	Size	CRI	Input	Luminous Flux		
GSU-1303	3W	Ø65*75mm	>90	90~280V	270LM		
GSU-1306	6W	Ø80*75mm	>90	90~280V	540LM		
GSU-1312	12W	Ø99*75mm	>90	90~280V	1080LM		



IP65	F						
COLOR: ☐ WH ☐ BK ☐ SV							
Model	Power	Size	CutSize	CRI	Input	Luminous Flux	Beam angle
GSU-0903R	3W	Ø45*75mm	Ø40*75mm	>90	90~280V	270LM	38°

GSU-0306



GSU-0903R

