



PRODUCT CATALOG

PART 2 Outdoor architectural & residential lighting



NOVETI PRODUCT CATALOG 2026 - PART 2

Outdoor Residential & Landscape Lighting

(Gardens, Villas, Terraces, Facades)

Residential Outdoor Lighting

- Wall-mounted Outdoor Luminaires
- Terrace & Patio Lighting
- Step & Stair Lighting
- Recessed Floor & Deck Lights

Landscape & Garden Lighting

- Garden Bollards
- Pathway & Walkway Lighting
- Tree & Vegetation Uplights
- Ground Recessed Projectors

Facade & Architectural Outdoor

- Facade Washers
- Accent Projectors
- Decorative Outdoor Fixtures






IP20	F						
COLOR: ☐ WH ☐ BK							
Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle
NGD-8910	10W	Ø75*67mm	Φ65mm	>90	90~280V	1122LM	15° / 24° / 38°
NGD-8915	15W	Ø92*80mm	Φ85mm	>90	90~280V	1818LM	15° / 24° / 38°
NGD-8920	20W	Ø102*94mm	Φ95mm	>90	90~280V	2453LM	15° / 24° / 38°
NGD-8935	35W	Ø114.5*106mm	Φ105mm	>90	90~280V	4144LM	15° / 24° / 38°
NGD-8945	45W	Ø124.5*115mm	Φ115mm	>90	90~280V	5094LM	15° / 24° / 38°



IP20	F						
COLOR: ☐ WH ☐ BK							
Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle
NGD-9010	10W	Ø82*67mm	Φ75mm	>90	90~280V	1122LM	15° / 24° / 38°
NGD-9015	15W	Ø105*85mm	Φ95mm	>90	90~280V	1818LM	15° / 24° / 38°
NGD-9020	20W	Ø110*95mm	Φ105mm	>90	90~280V	2453LM	15° / 24° / 38°
NGD-9035	35W	Ø112.5*115mm	Φ115mm	>90	90~280V	4144LM	15° / 24° / 38°
NGD-9045	45W	Ø132*125mm	Φ125mm	>90	90~280V	5094LM	15° / 24° / 38°



IP20	F						
COLOR: ☐ WH ☐ BK							
Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle
NGD-9010-2	10W*2	175*92*67mm	160*80mm	>90	90~280V	1122LM	15° / 24° / 38°
NGD-9015-2	15W*2	215*122*85mm	200*110mm	>90	90~280V	1818LM	15° / 24° / 38°
NGD-9020-2	20W*2	245*122*95mm	230*110mm	>90	90~280V	2453LM	15° / 24° / 38°
NGD-9035-2	35W*2	255*142*115mm	240*130mm	>90	90~280V	4144LM	15° / 24° / 38°
NGD-9045-2	45W*2	295*142*125mm	280*130mm	>90	90~280V	5094LM	15° / 24° / 38°

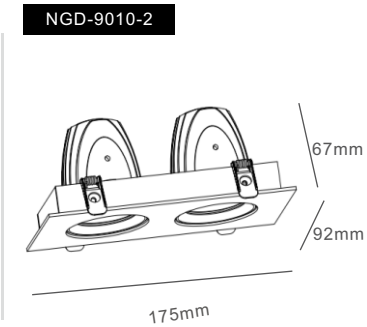

INDOOR LIGHT



COLOR: ☐ WH ☐ BK

Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle
NGD-8910L	10W	Ø75*67mm	Φ65mm	>90	90~280V	1122LM	15° / 24° / 38°
NGD-8915L	15W	Ø92*80mm	Φ85mm	>90	90~280V	1818LM	15° / 24° / 38°
NGD-8920L	20W	Ø102*94mm	Φ95mm	>90	90~280V	2453LM	15° / 24° / 38°
NGD-8935L	35W	Ø114.5*106mm	Φ105mm	>90	90~280V	4144LM	15° / 24° / 38°
NGD-8945L	45W	Ø124.5*115mm	Φ115mm	>90	90~280V	5094LM	15° / 24° / 38°




COLOR: ☐ WH ☐ BK

Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle
NGD-9010L	10W	Ø82*67mm	Φ75mm	>90	90~280V	1122LM	15° / 24° / 38°
NGD-9015L	15W	Ø105*85mm	Φ95mm	>90	90~280V	1818LM	15° / 24° / 38°
NGD-9020L	20W	Ø110*95mm	Φ105mm	>90	90~280V	2453LM	15° / 24° / 38°
NGD-9035L	35W	Ø112.5*115mm	Φ115mm	>90	90~280V	4144LM	15° / 24° / 38°
NGD-9045L	45W	Ø132*125mm	Φ125mm	>90	90~280V	5094LM	15° / 24° / 38°



NGD-8910L



67mm

Ø75mm

NGD-9010L



67mm

Ø82mm

INDOOR LIGHT

INDOOR LIGHT



IP20					COLOR: ☐ WH ☒ BK		
Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle
NGD-9309	9W	179*53*45mm	170*44mm	>90	90~280V	500LM	24°/38°
NGD-9309-2	9W*2	179*84*45mm	170*76mm	>90	90~280V	1000LM	24°/38°
NGD-9309-3	9W*3	179*115*45mm	170*108mm	>90	90~280V	1700LM	24°/38°



IP20

COLOR:


☐ WH

☒ BK



Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle
NGD-9318	18W	329*53*45mm	320*44mm	>90	90~280V	1300LM	24°/38°
NGD-9318-2	18W*2	329*84*45mm	320*76mm	>90	90~280V	2200LM	24°/38°
NGD-9336	18W	629*53*45mm	620*44mm	>90	90~280V	4500LM	24°/38°



IP20					COLOR:			
	Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle
	NGD-9409	9W	179*53*45mm	170*44mm	>90	90~280V	580LM	24°/38°
	NGD-9409-2	9W*2	179*84*45mm	170*76mm	>90	90~280V	1100LM	24°/38°
	NGD-9409-3	9W*3	179*115*45mm	170*108mm	>90	90~280V	1600LM	24°/38°

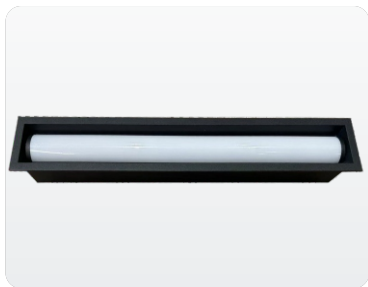

IP20					COLOR: ☐ WH ☒ BK		
Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle
NGD-9418	18W	329*53*45mm	320*44mm	>90	90~280V	1200LM	24°/38°
NGD-9418-2	18W*2	329*84*45mm	320*76mm	>90	90~280V	2000LM	24°/38°
NGD-9436	18W	629*53*45mm	620*44mm	>90	90~280V	3000LM	24°/38°

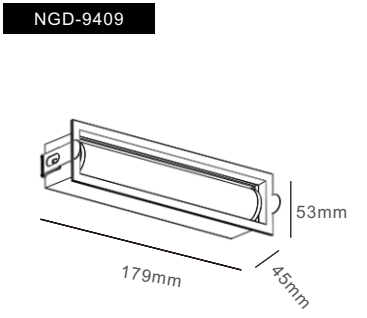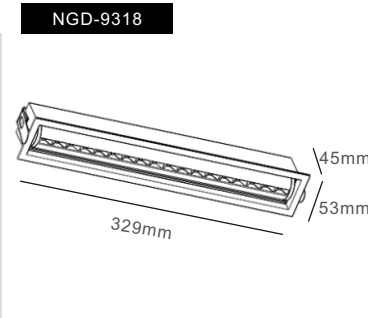

INDOOR LIGHT








IP20	F			CE	COLOR: ☐ WH ☒ BK		
Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle
NGD-9518	6W*3	629*53*45mm	620*44mm	>90	90~280V	480LM	24°/38°



IP20	F			CE	COLOR: ☐ WH ☒ BK		
Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle
NGD-9648	48W	329*115*45mm	320*108mm	>90	90~280V	480LM	24°/38°



IP20	F			CE	COLOR: ☐ WH ☒ BK		
Model	Power	Size	Cut size	CRI	Input	Luminous Flux	Beam angle
NGD-9748	48W	329*115*45mm	320*108mm	>90	90~280V	5400LM	24°/38°

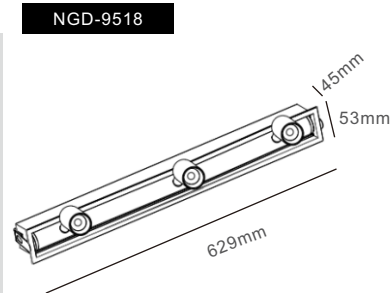

INDOOR LIGHT



Model	Size
GSP-07-1	Φ30*70*2000mm



Model	Size
GSP-07-2	Φ30*77*2000mm



Model	Size
GSP-07-1M	Φ30*70*100mm



Model	Size
GSP-07-2M	Φ30*77*100mm



Model	Size
GSP-07-1A	Φ30*80*2000mm
GSP-07-2A	Φ30*77*2000mm




Model	Size
GSP-07-1MA	Φ30*80*100mm
GSP-07-2MA	Φ30*77*100mm



Model	Size
GSP-07-3	Φ30*29.5

INDOOR LIGHT



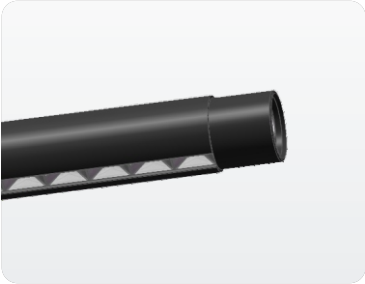

IP20

F


CE

COLOR:

WH

BK

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSP-0715	15W	Ø30*600mm	>90	48V	480LM	24°/38°
GSP-0728	28W	Ø30*1200mm	>90	48V	480LM	24°/38°
GSP-0756	56W	Ø30*2400mm	>90	48V	480LM	24°/38°

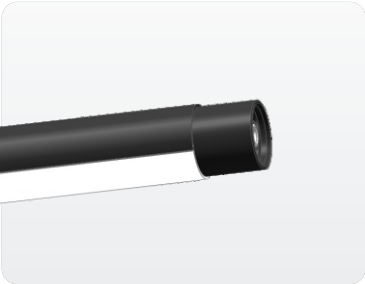

IP20

F

CE

COLOR:

WH

BK

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSP-0815	15W	Ø30*600mm	>90	48V	480LM	24°/38°
GSP-0828	28W	Ø30*1200mm	>90	48V	480LM	24°/38°
GSP-0856	56W	Ø30*2400mm	>90	48V	480LM	24°/38°



IP20

F




CE

COLOR:

WH

BK

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSP-0915	15W	Ø30*600mm	>90	48V	480LM	24°/38°
GSP-0928	28W	Ø30*1200mm	>90	48V	480LM	24°/38°
GSP-0956	56W	Ø30*2400mm	>90	48V	480LM	24°/38°

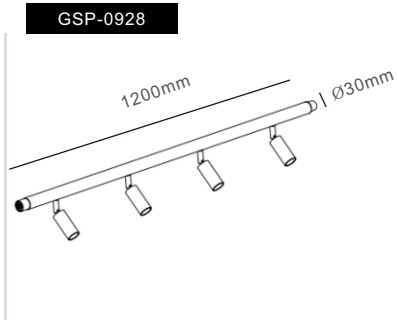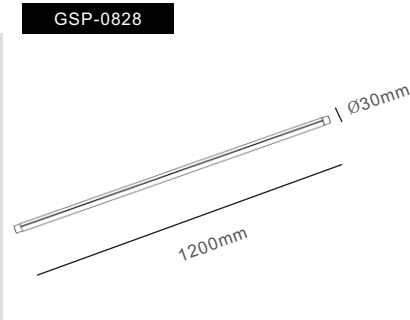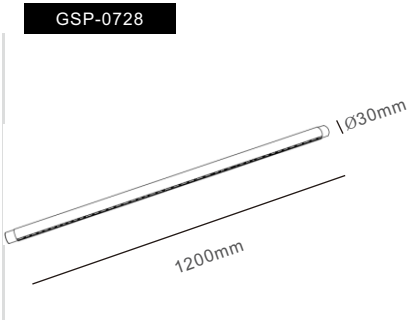



COLOR: ☐ WH ☒ BK

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
NGC-3712	12W	Φ106*44.5mm	>80	90~280V	960LM	120°
NGC-3718	18W	Φ150*44.5mm	>80	90~280V	1440LM	120°
NGC-3724	24W	Φ180*44.5mm	>80	90~280V	1920M	120°



COLOR: ☐ WH ☒ BK

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
NGC-3807	7W	Φ55.5*85mm	>90	90~280V	400LM	24°/36°/60°
NGC-3812	12W	Φ67*85mm	>90	90~280V	800LM	24°/36°/60°
NGC-3818	18W	Φ90*82mm	>90	90~280V	1700LM	24°/36°/60°



COLOR: ☐ WH ☒ BK




Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
NGC-3907	7W	Φ55.5*67mm	>90	90~280V	400LM	24°/36°/60°
NGC-3912	12W	Φ67*72mm	>90	90~280V	800LM	24°/36°/60°
NGC-3918	18W	Φ90*75.5mm	>90	90~280V	1700LM	24°/36°/60°



Adjustable Focus

COLOR: ☐ WH ☒ BK

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
NGC-4007	7W	Φ55.5*85mm	>90	90~280V	668LM	24°/36°/60°
NGC-4012	12W	Φ67*85mm	>90	90~280V	1400LM	24°/36°/60°
NGC-4018	18W	Φ90*86mm	>90	90~280V	2400LM	24°/36°/60°

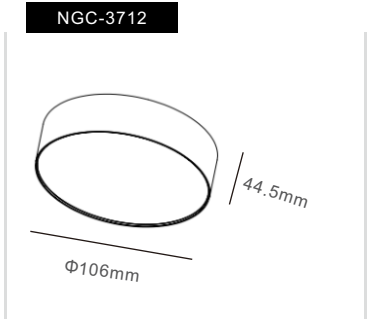

INDOOR LIGHT



COLOR: ☐ WH ☒ BK

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
NGC-4210	8W	62*32*117mm	>90	90~280V	840LM	15° / 24° / 38°



COLOR: ☐ WH ☒ BK


Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
NGC-4220	16W	62*62*117mm	>90	90~280V	1880LM	15° / 24° / 38°




COLOR: ☐ WH ☒ BK

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
NGC-4225	20W	152*32*117mm	>90	90~280V	1950LM	15° / 24° / 38°


NGC-4210



NGC-4220



NGC-4225

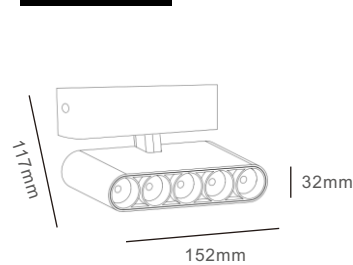

INDOOR LIGHT





COLOR: ☐ WH ☐ BK

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
NGC-3507	7W	Ø61*70mm	>90	90~280V	630LM	36°
NGC-3512	12W	Ø80*81mm	>90	90~280V	1080LM	36°



COLOR: ☐ WH ☐ BK


Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
NGT-1630	30W	Ø96*172*235mm	>90	90~280V	4144LM	15° / 24° / 38°
NGT-1645	45W	Ø106*172*243mm	>90	90~280V	5094LM	15° / 24° / 38°




COLOR: ☐ WH ☐ BK

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
NGT-1710	10W	Ø56*110*145mm	>90	90~280V	1122LM	15° / 24° / 38°
NGT-1715	15W	Ø73*130*178mm	>90	90~280V	1818LM	15° / 24° / 38°
NGT-1720	20W	Ø83*150*196mm	>90	90~280V	2453LM	15° / 24° / 38°
NGT-1735	35W	Ø96*177*220mm	>90	90~280V	4144LM	15° / 24° / 38°
NGT-1745	45W	Ø106*177*232mm	>90	90~280V	5094LM	15° / 24° / 38°


NGC-3507



NGT-1630



NGT-1710






IP20	F			CE	COLOR: ☐ WH ☒ BK	
Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
NGT-2010	8W	121*41*127mm	>90	90~280V	840LM	15° / 24° / 38°




IP20	F			CE	COLOR: ☐ WH ☒ BK	
Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
NGT-2020	16W	124*71*127.5mm	>90	90~280V	1880LM	15° / 24° / 38°



IP20	F			CE	COLOR: ☐ WH ☒ BK	
Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
NGT-2025	20W	186*41*136mm	>90	90~280V	1950LM	15° / 24° / 38°

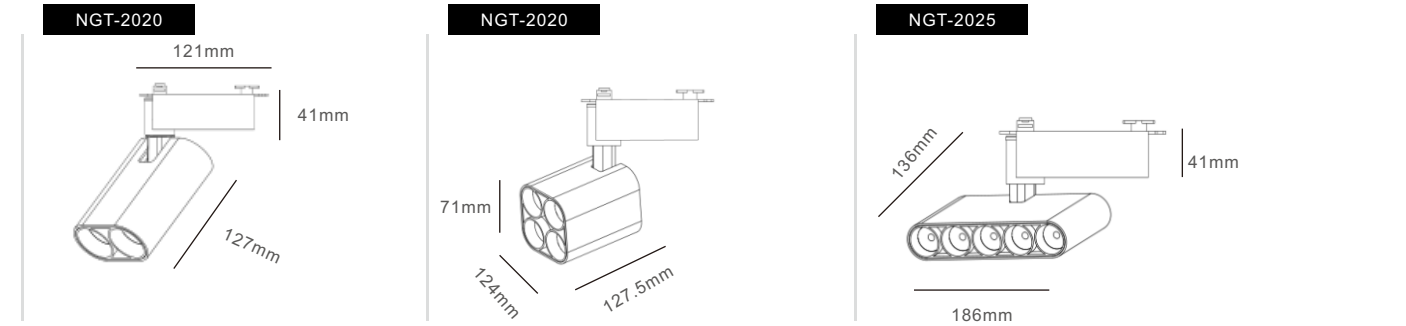

INDOOR LIGHT

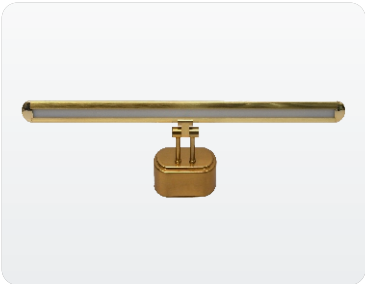



COLOR: ☐ WH ☐ BK ☐ SV ☐ GD

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GOW-2206	6W	274*(103*52)*105mm	>90	90~280V	570LM	180°
GOW-2212	12W	500*(103*52)*105mm	>90	90~280V	1150LM	180°



COLOR: ☐ WH ☐ BK ☐ SV ☐ GD

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GOW-6612	12W	490*130*146mm	>90	90~280V	1150LM	180°

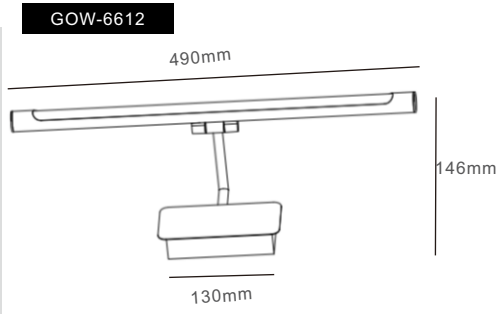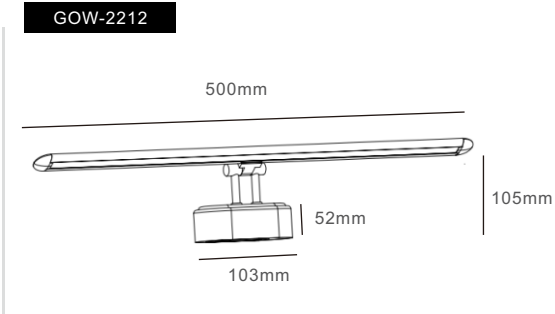

INDOOR LIGHT





IP54 F    CE

COLOR: ☐ WH ☒ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GOW-2602	1W*2	65*59*52mm	>80	90~280V	160LM	60°
GOW-2604	1W*4	100*59*52mm	>80	90~280V	320LM	60°
GOW-2606	1W*6	145*59*52mm	>80	90~280V	480LM	60°
GOW-2608	1W*8	205*59*52mm	>80	90~280V	640LM	60°
GOW-2612	1W*12	429*59*52mm	>80	90~280V	960LM	60°



IP54 F    CE

COLOR: ☐ WH ☒ BK ☐ SV

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GOW-2602L	1W*2	65*59*52mm	>80	90~280V	160LM	60°
GOW-2604L	1W*4	100*59*52mm	>80	90~280V	320LM	60°
GOW-2606L	1W*6	145*59*52mm	>80	90~280V	480LM	60°
GOW-2608L	1W*8	205*59*52mm	>80	90~280V	640LM	60°
GOW-2612L	1W*12	429*59*52mm	>80	90~280V	960LM	60°



IP54 F    CE

COLOR: ☐ WH ☒ BK ☐ SV


Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GOW-2802	1W*2	65*59*52mm	>80	90~280V	160LM	60°
GOW-2804	1W*4	100*59*52mm	>80	90~280V	320LM	60°
GOW-2806	1W*6	145*59*52mm	>80	90~280V	480LM	60°
GOW-2808	1W*8	205*59*52mm	>80	90~280V	640LM	60°
GOW-2812	1W*12	429*59*52mm	>80	90~280V	960LM	60°



IP54 F    CE

COLOR: ☐ WH ☒ BK ☐ SV



Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GOW-2802L	1W*2	65*59*52mm	>80	90~280V	160LM	60°
GOW-2804L	1W*4	100*59*52mm	>80	90~280V	320LM	60°
GOW-2806L	1W*6	145*59*52mm	>80	90~280V	480LM	60°
GOW-2808L	1W*8	205*59*52mm	>80	90~280V	640LM	60°
GOW-2812L	1W*12	429*59*52mm	>80	90~280V	960LM	60°

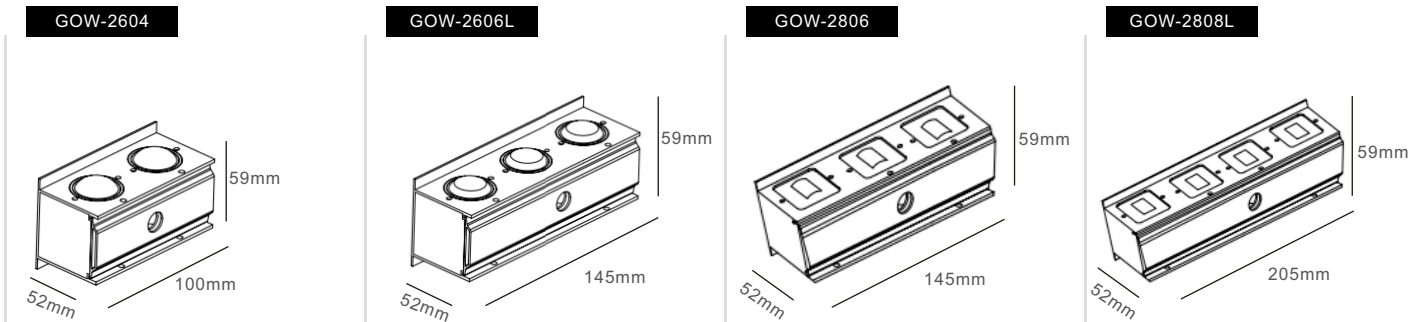

OUTDOOR LIGHT



OUTDOOR LIGHT

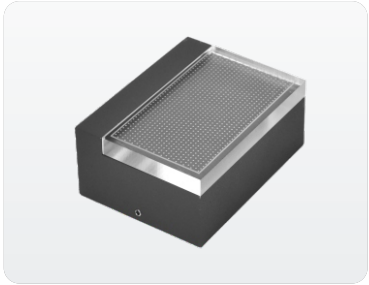

COLOR: ☐ WH ☒ BK ☐ SV


Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GOW-3003	3W	92*70*32mm	>80	90~280V	240LM	38°
GOW-3006	6W	150*70*32mm	>80	90~280V	480LM	38°




COLOR: ☐ WH ☒ BK ☐ SV ☐ GD

Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GOW-3106	1W*2	160*51*44mm	>90	90~280V	160LM*2	38°
GOW-3112	3W*2	240*60*44mm	>90	90~280V	240LM*2	38°

GOW-3003



GOW-3106





IP65	F					
COLOR: BK SV						
Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSG-3506	6W	Φ56*96*92mm	>90	90~280V	540LM	24°/36°/60°
GSG-3512	12W	Φ73*110*117mm	>90	90~280V	1080LM	24°/36°/60°





IP65	F					
COLOR: BK SV						
Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSG-3506X	6W	Φ56*96*236mm	>90	90~280V	540LM	24°/36°/60°
GSG-3512X	12W	Φ73*110*246mm	>90	90~280V	1080LM	24°/36°/60°




IP65	F					
COLOR: BK SV						
Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSG-3606	6W	Φ56*86*92mm	>90	90~280V	540LM	24°/36°/60°
GSG-3612	12W	Φ73*105*117mm	>90	90~280V	1080LM	24°/36°/60°



IP65	F					
COLOR: BK SV						
Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSG-3606X	6W	Φ56*86*236mm	>90	90~280V	540LM	24°/36°/60°
GSG-3612X	12W	Φ73*105*246mm	>90	90~280V	1080LM	24°/36°/60°



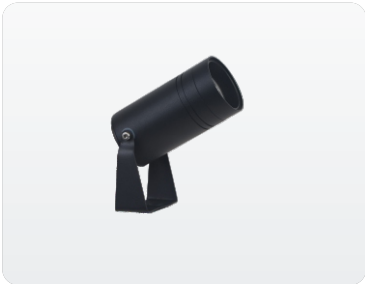


IP65	F					
COLOR: BKSV						
Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSG-5106	6W	Φ50*97*87mm	>90	90~280V	540LM	24°/36°/60°
GSG-5112	12W	Φ60*113*92mm	>90	90~280V	1080LM	24°/36°/60°
GSG-5118	18W	Φ70*123*98mm	>90	90~280V	1620LM	24°/36°/60°




IP65	F					
COLOR: BKSV						
Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSG-5106X	6W	Φ50*97*247mm	>90	90~280V	540LM	24°/36°/60°
GSG-5112X	12W	Φ60*113*252mm	>90	90~280V	1080LM	24°/36°/60°
GSG-5118X	18W	Φ70*123*258mm	>90	90~280V	1620LM	24°/36°/60°


GSG-5106



GSG-5106X



OUTDOOR LIGHT

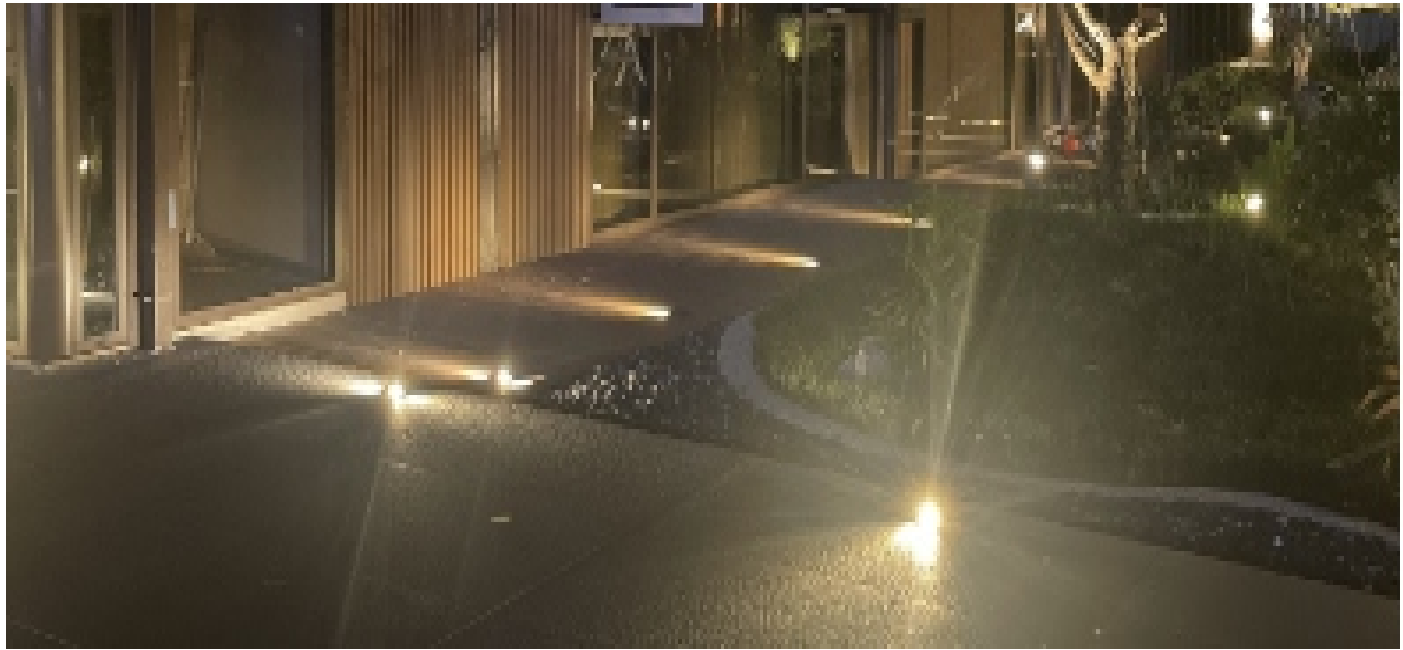

OUTDOOR LIGHT



IP65	F			CE	COLOR: BK SV	
Model	Power	Size	CRI	Input	Luminous Flux	Beam angle
GSU-2003	2W	Ø78*30mm	>80	90~280V	160LM	38°
GSU-2006	2W*2	Ø78*30mm	>80	90~280V	320LM	38°

GSU-2006

